
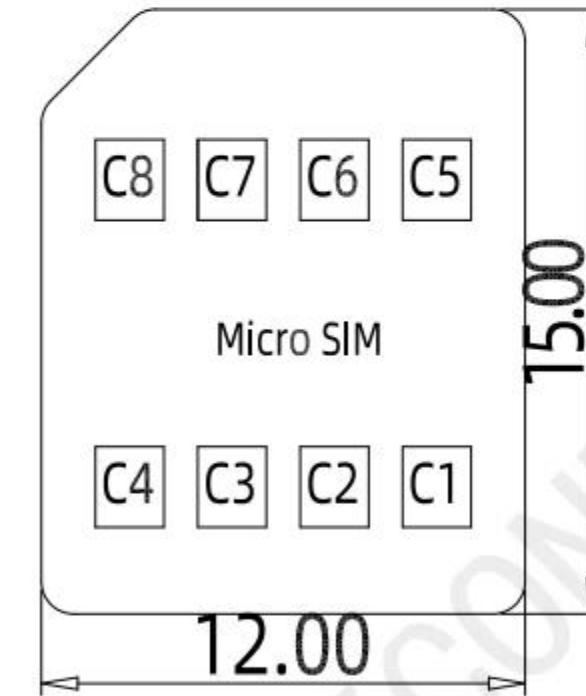
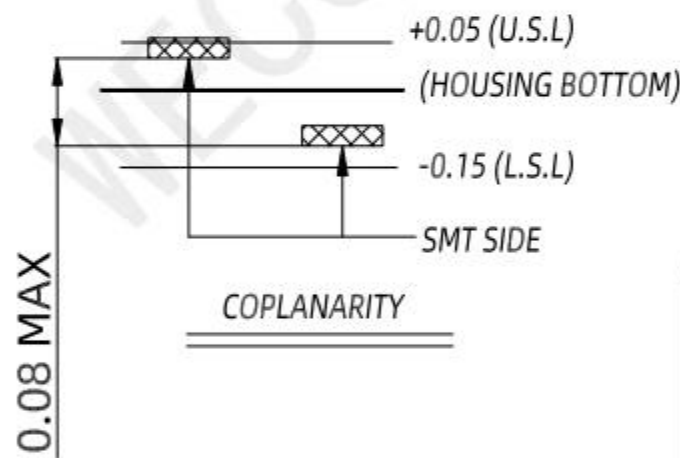
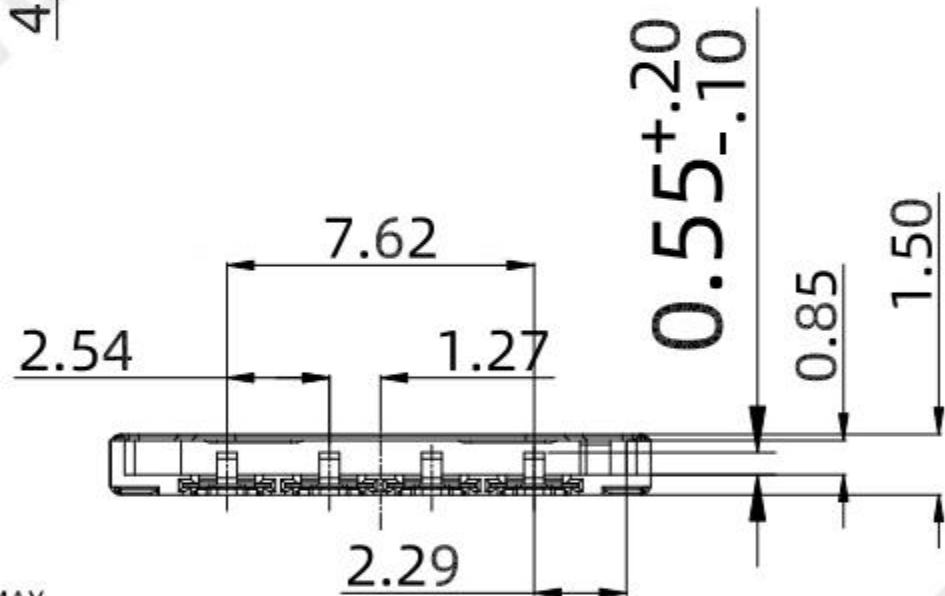


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.12.03	Michael	Mark	Cornelia

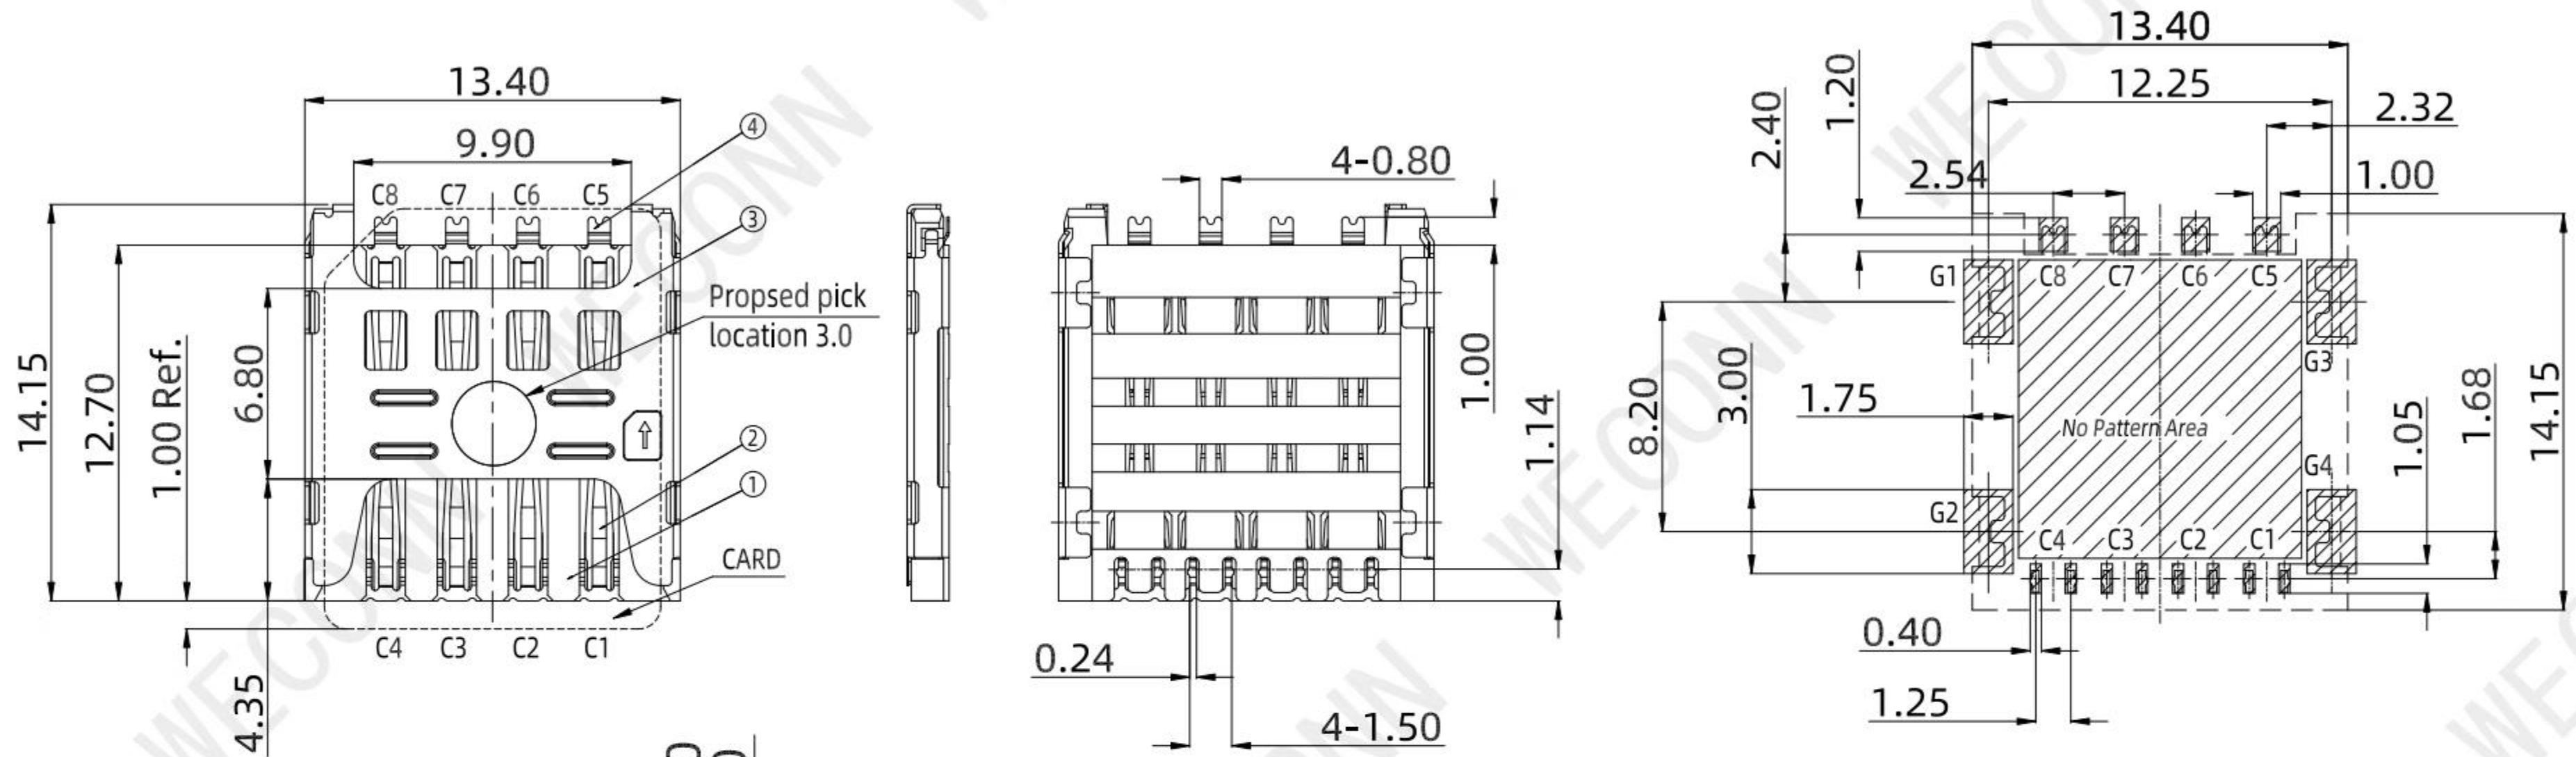

G1-GN pin is defined as GND

RECOMMENDED PCB LAYOUT (TOLERANCE ±0.05)  
RECOMMENDED METAL MASK T=0.12MM

- NOTES:
- MATERIAL: SEE TABLE
  - Rated current: 1.0A
  - Rated voltage: 30V
  - Contact Resistance: 50mΩ MAX
  - Insulation Resistance: 1000MΩ MIN 500V DC
  - Dielectric withstanding voltage: 500V DC
  - Solder ability: 250°C ± 5°C, 10s ± 0.5s
  - Durability: 3000 Cycles Min. Contact Resistance 50mΩ Max
  - Mating and Unmating force  
Insertion Force 10N Max  
Withdrawal Force 10N Max
  - Noraml Force: 30~100g (Noraml card)  
Noraml working stroke: 0.3mm Min (Noraml card)
  - Operating condition: Temperature -40°C ~ +85°C;  
Humidity 80% R.H MAX

PLEASE CONTACT WELINK SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

NO.	PART NAME	QUANTITY	MATERIAL	COLOR/PLATING
4	TERMINAL 2	4PCS	C5210R	CONTACT: 1u"Au; solder: 1u"Au; 60u"NI PLATING
3	COVER	1PCS	SUS304	solder: 1u"Au; 30u"NI PLATING
2	TERMINAL 1	4PCS	C5210R	CONTACT: 1u"Au; solder: 1u"Au; 60u"NI PLATING
1	HOUSING	1PCS	LCP	BLACK

MILLIMETERS	INCH	UNITS
X.° ± 2°	X.° ± 2°	MM
.X ± 0.30	.XX ± 0.012	MAT'L
.XX ± 0.20	.XXX ± 0.008	FINISH
.XXX ± 0.10	.XXXX ± 0.004	QTY

THESE DRAWINGS AND SPECIFICATION ARE WELINK SHENZHEN WELINK ELECTRONICS CO., LTD COPIED OR USED IN ANY MANNER WITHOUT WELINK SHENZHEN WELINK ELECTRONICS CO., LTD

**WECONN** 深圳市微连电子有限公司  
**ShenZhen Welink Electronics Co., Ltd**

PART NUMBER: **WL-SIM150-107**  
TITLE: **MICRO SIM卡座 插拔式 8P 防溃P**


DWG NO.: **WL-SIM150-107**  
SCALE: 1:1, SHEET: 1/2, REV: A1

APPD: **Cornelia**  
CHKD: **Mark**  
DR: **Michael**


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.12.03	Michael	Mark	Cornelia

<Figure 1>

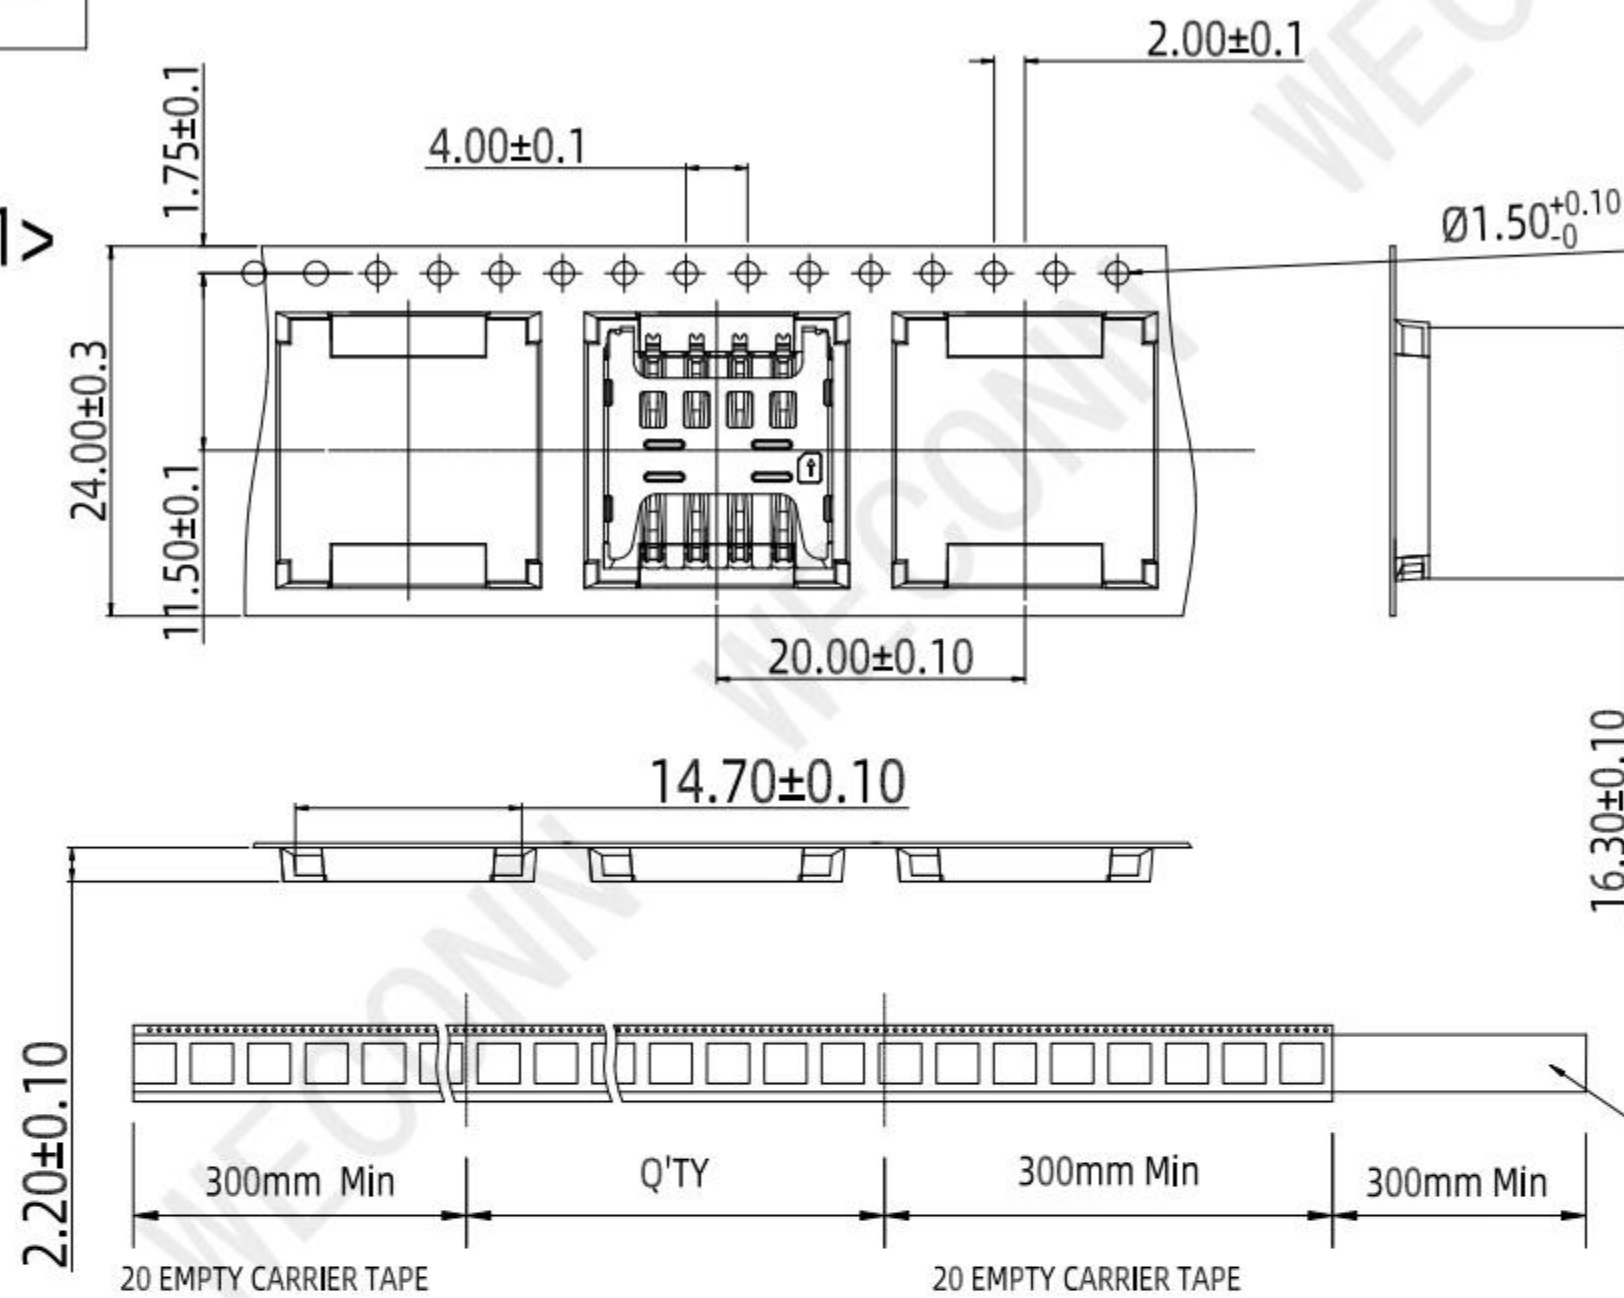

<Figure 2>

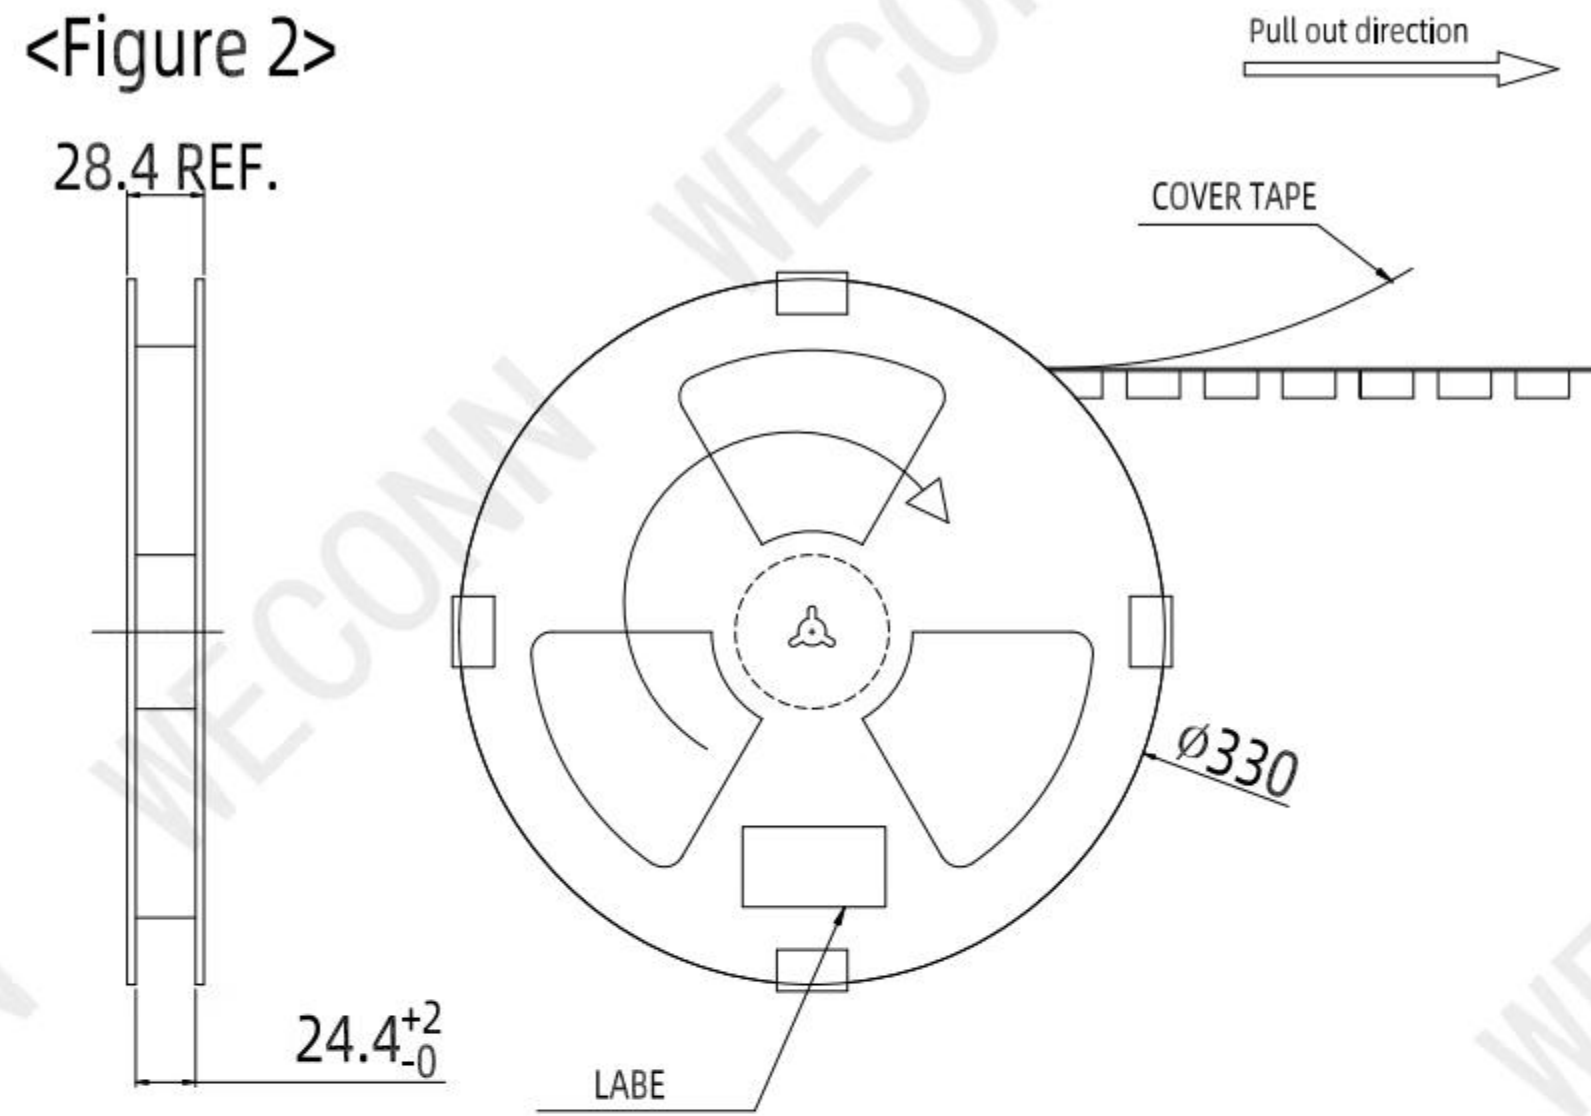


<TABLE 1> PACKAGING QUANTITY

QTY/REEL	REEL/CARTON	QTY/CARTON
1300	10	13000

NOTE:

- Place the product in the download as shown in <Figure 1>, and place 1 PCS product per hole.
- After the packaging machine is wrapped, stick tape on each equal point of the REEL to prevent the REEL from opening. Each REEL affixed 1PCS label, as shown in <Figure 2>
- The packaging quantity is shown as <TABLE 1>
- Packed into a box, as shown in <Figure 3> Put the styrofoam board at the bottom of the box, and then put the specified number of rolled products in waterproof bags and put them in the box. Put four triangular guards into the four corners, and put the styrofoam board on the top layer.
- Seal the box, write the material number, quantity, etc. on the sealed carton according to customer requirements

<Figure 3>

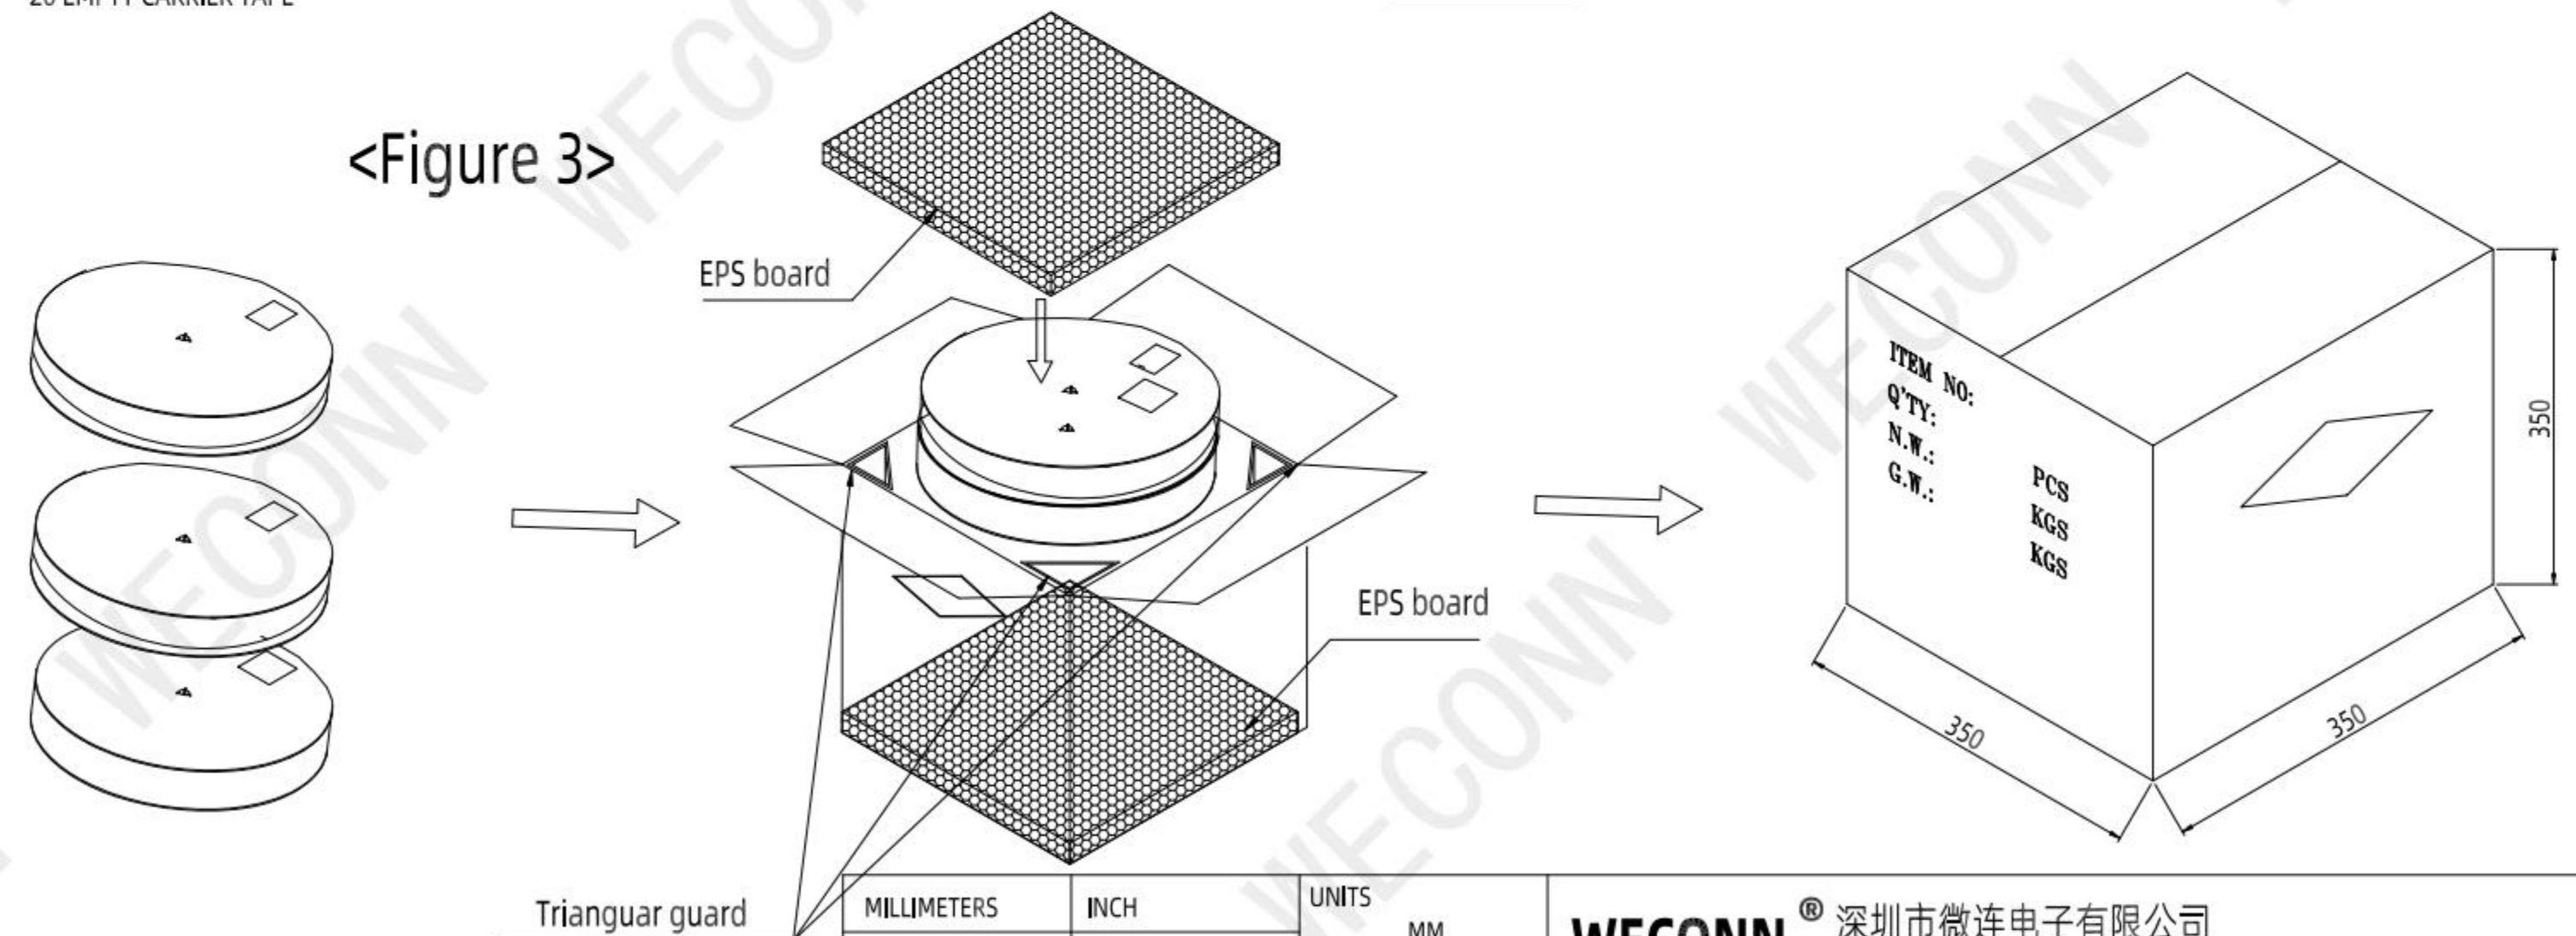

MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd			
X° ± 2°	X° ± 2°	MM	PART NUMBER: <b>WL-SIM150-107</b>		TITLE: MICRO SIM卡座 插拔式 8P 防渍P	
.X ± 0.30	.XX ± 0.012	MAT'L	DWG NO.: <b>WL-SIM150-107</b>		APPD:	Cornelia
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	SCALE		CHKD:	Mark
.XXX ± 0.10	.XXXX ± 0.004	FINISH	1:1	SHEET	DR:	Michael
SEE NOTES		QTY	2/2	REV.		
SEE NOTES		SEE NOTES	A1			

THESE DRAWINGS AND PECIFICATION ARE Welink ShenZhen Welink Electronics Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT Welink ShenZhen Welink Electronics Co.,Ltd