
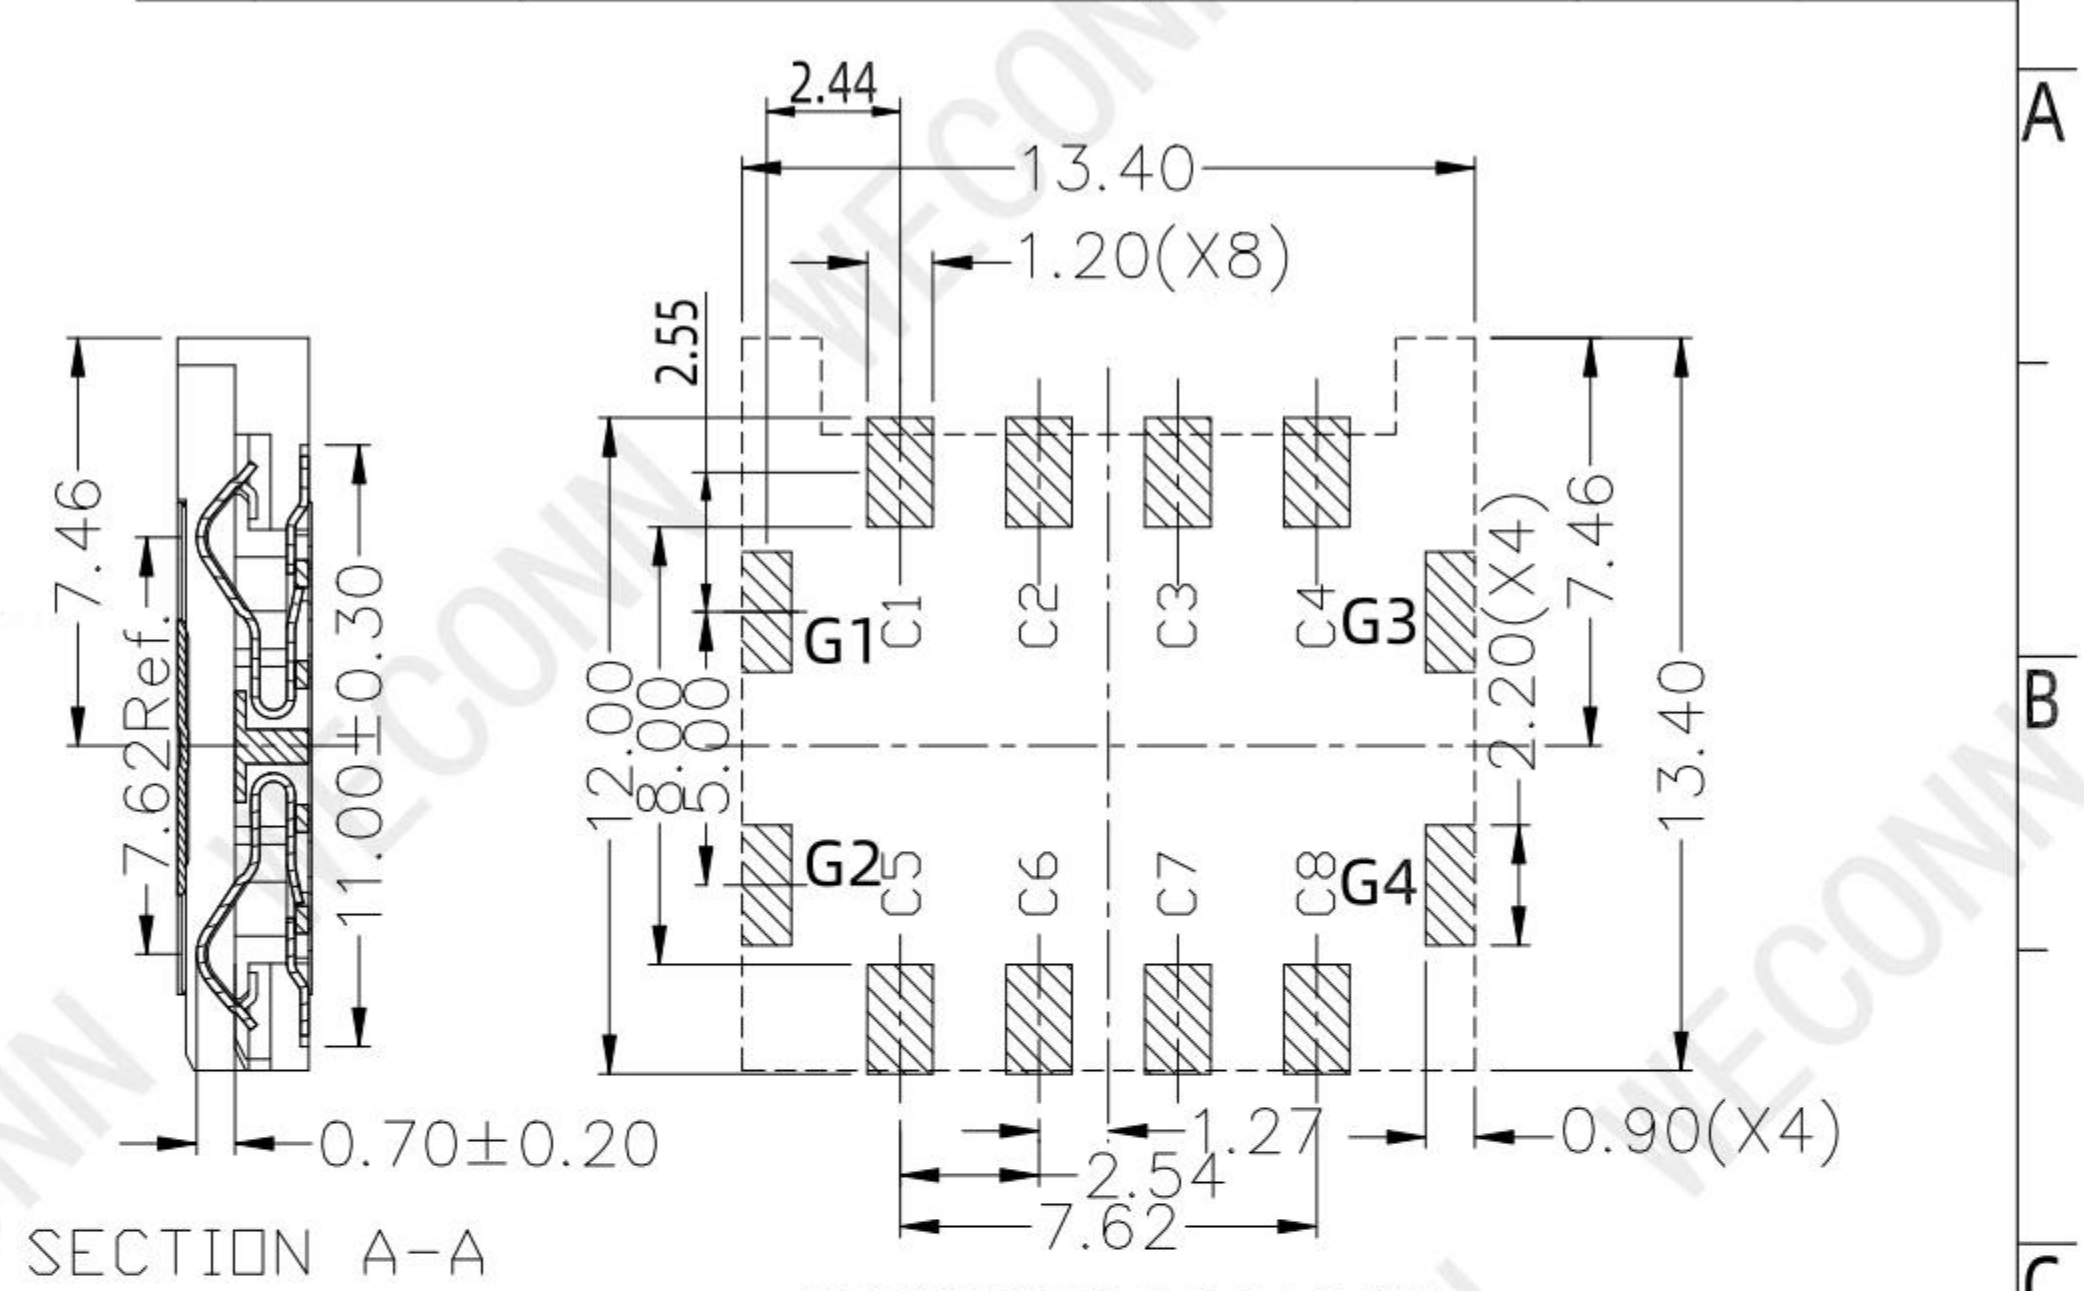


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.12.13	Michael	Mark	Cornelia

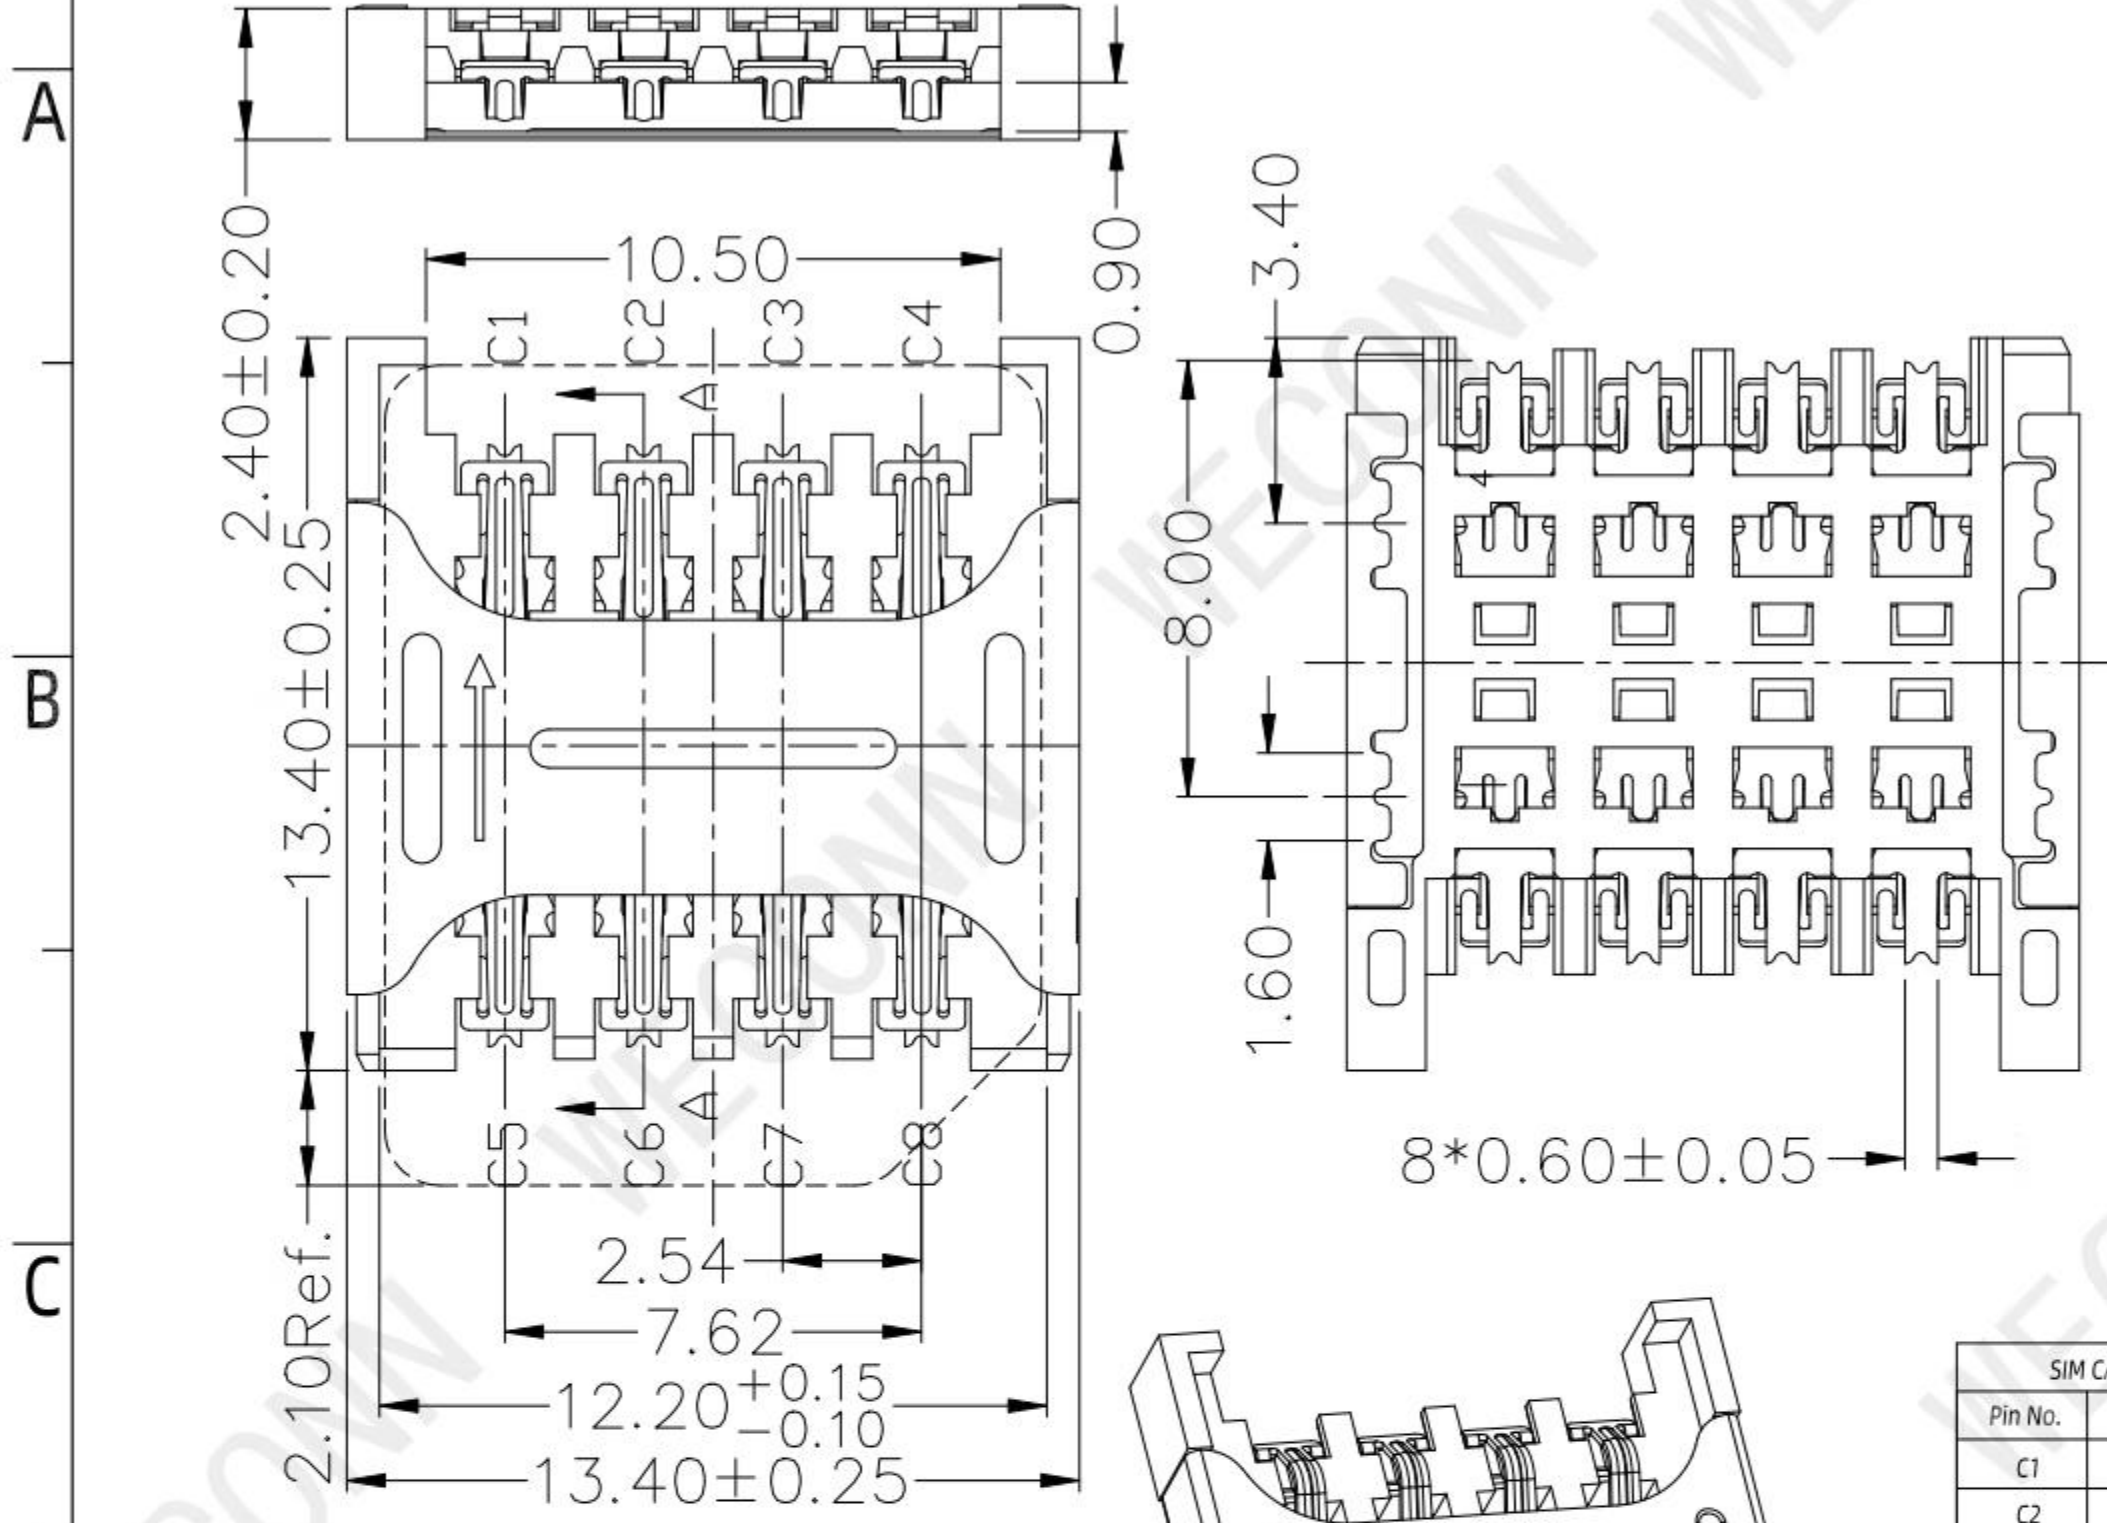

SECTION A-A


TECHNICAL CHARACTERISTICS

- General Characteristics
Dimensions: 13.40LX13.40WX2.40H mm
Weight: Approx0.40±0.1g
Durability: 5,000 cycles min.
- Electrical Characteristics
Contact resistance: 50mΩ typical, 100mΩ max
Insulation resistance: >1000MΩ/500V DC
- Solderability
Vapor phase: 215°C, 30sec. Max
IR reflow: 250°C, 5sec. Max
Manual soldering: 370°C, 3sec. Max
- Environmental Characteristics
Operating temperature: -40°C~+85°C
Operating humidity: 10%~+95%RH

Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

PLEASE CONTACT WELINK SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	8	Copper Alloy	Contact area: Gold plated
3	SHFLL	1	Stainless steel	SMT area: Gold plated

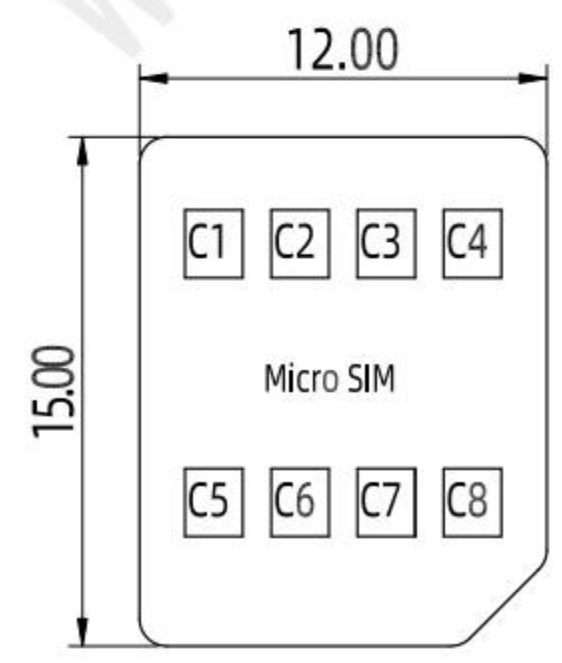


MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd	
X.° ± 2°	X.° ± 2°	MM	PART NUMBER: WL-SIM365-089 TITLE: MICRO SIM卡座 插拔式 8P	
.X ± 0.30	.XX ± 0.012	MAT'L SEE NOTES	DWG NO.: WL-SIM365-089	
.XX ±	.XXX ±	FINISH SEE NOTES	APPD: Cornelia	CHKD: Mark
.XXX ±	.XXXX ±	QTY SEE NOTES	DR: Michael	
THESE DRAWINGS AND SPECIFICATION ARE Welink ShenZhen Welink Electronics Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT Welink			SCALE: 1:1	SHEET: 1/2
			REV.:	A1


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.12.13	Michael	Mark	Cornelia

<Figure 1>

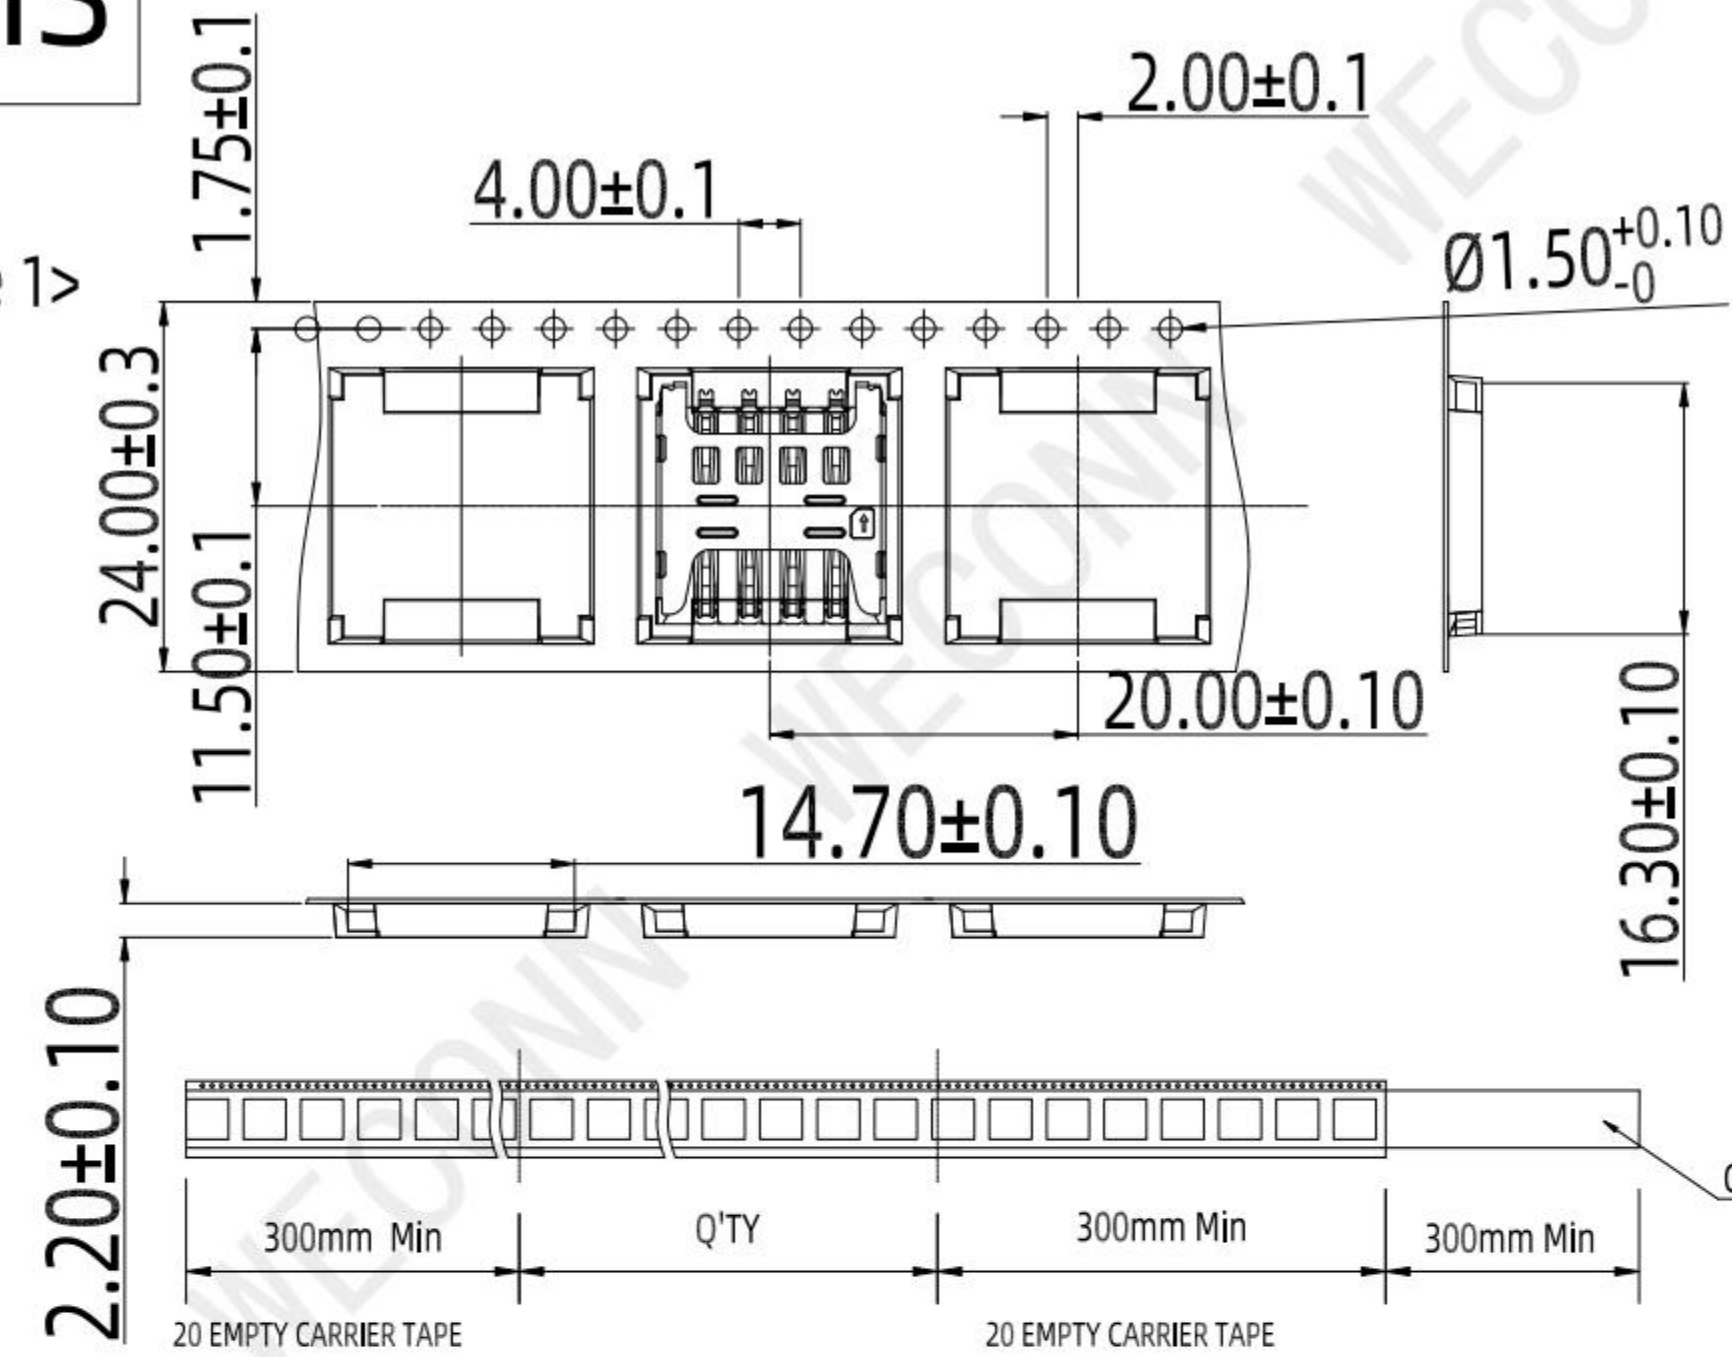

<Figure 2>

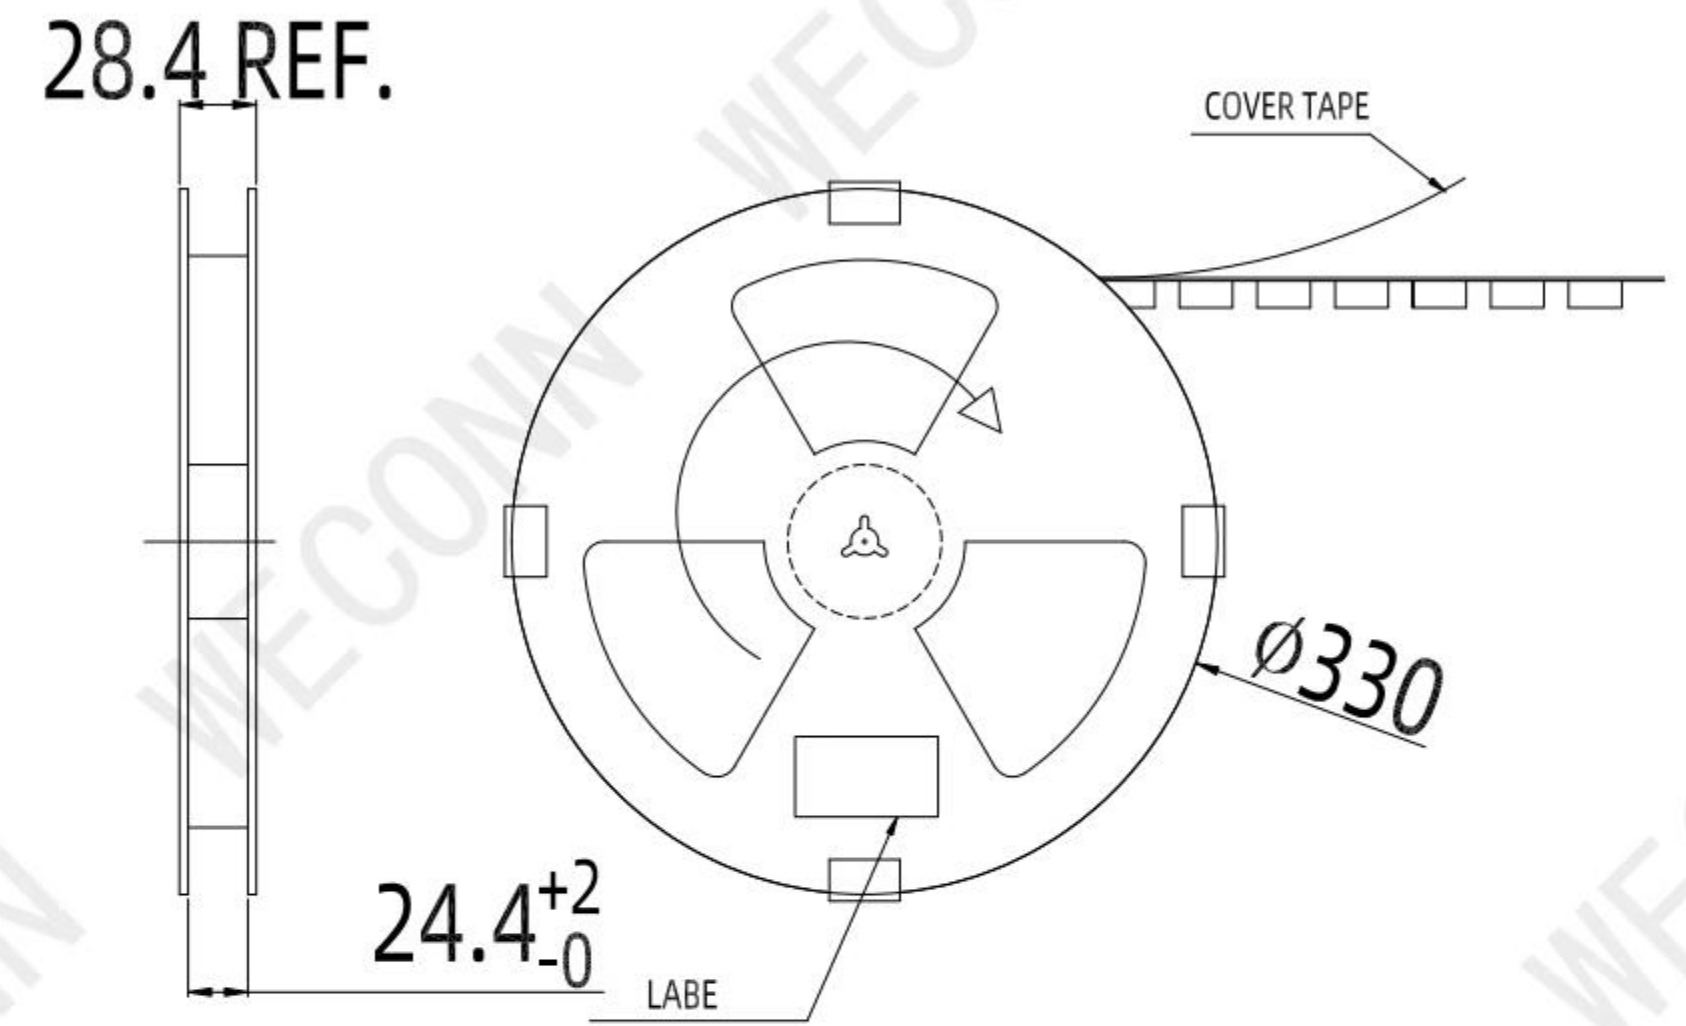


<TABLE 1> PACKAGING QUANTITY

QTY/REEL	REEL/CARTON	QTY/CARTON
900	10	9000

NOTE:

- Place the product in the download as shown in <Figure 1>, and place 1 PCS product per hole.
 - After the packaging machine is wrapped, stick tape on each equal point of the REEL to prevent the REEL from opening.
 - Each REEL affixed 1PCS label, as shown in <Figure 2>
 - The packaging quantity is shown as <TABLE 1>
 - Packed into a box, as shown in <Figure 3>
- Put the styrofoam board at the bottom of the box, and then put the specified number of rolled products in waterproof bags and put them in the box.
- Put four triangular guards into the four corners, and put the styrofoam board on the top layer.
- Seal the box, write the material number, quantity, etc. on the sealed carton according to customer requirements

<Figure 3>

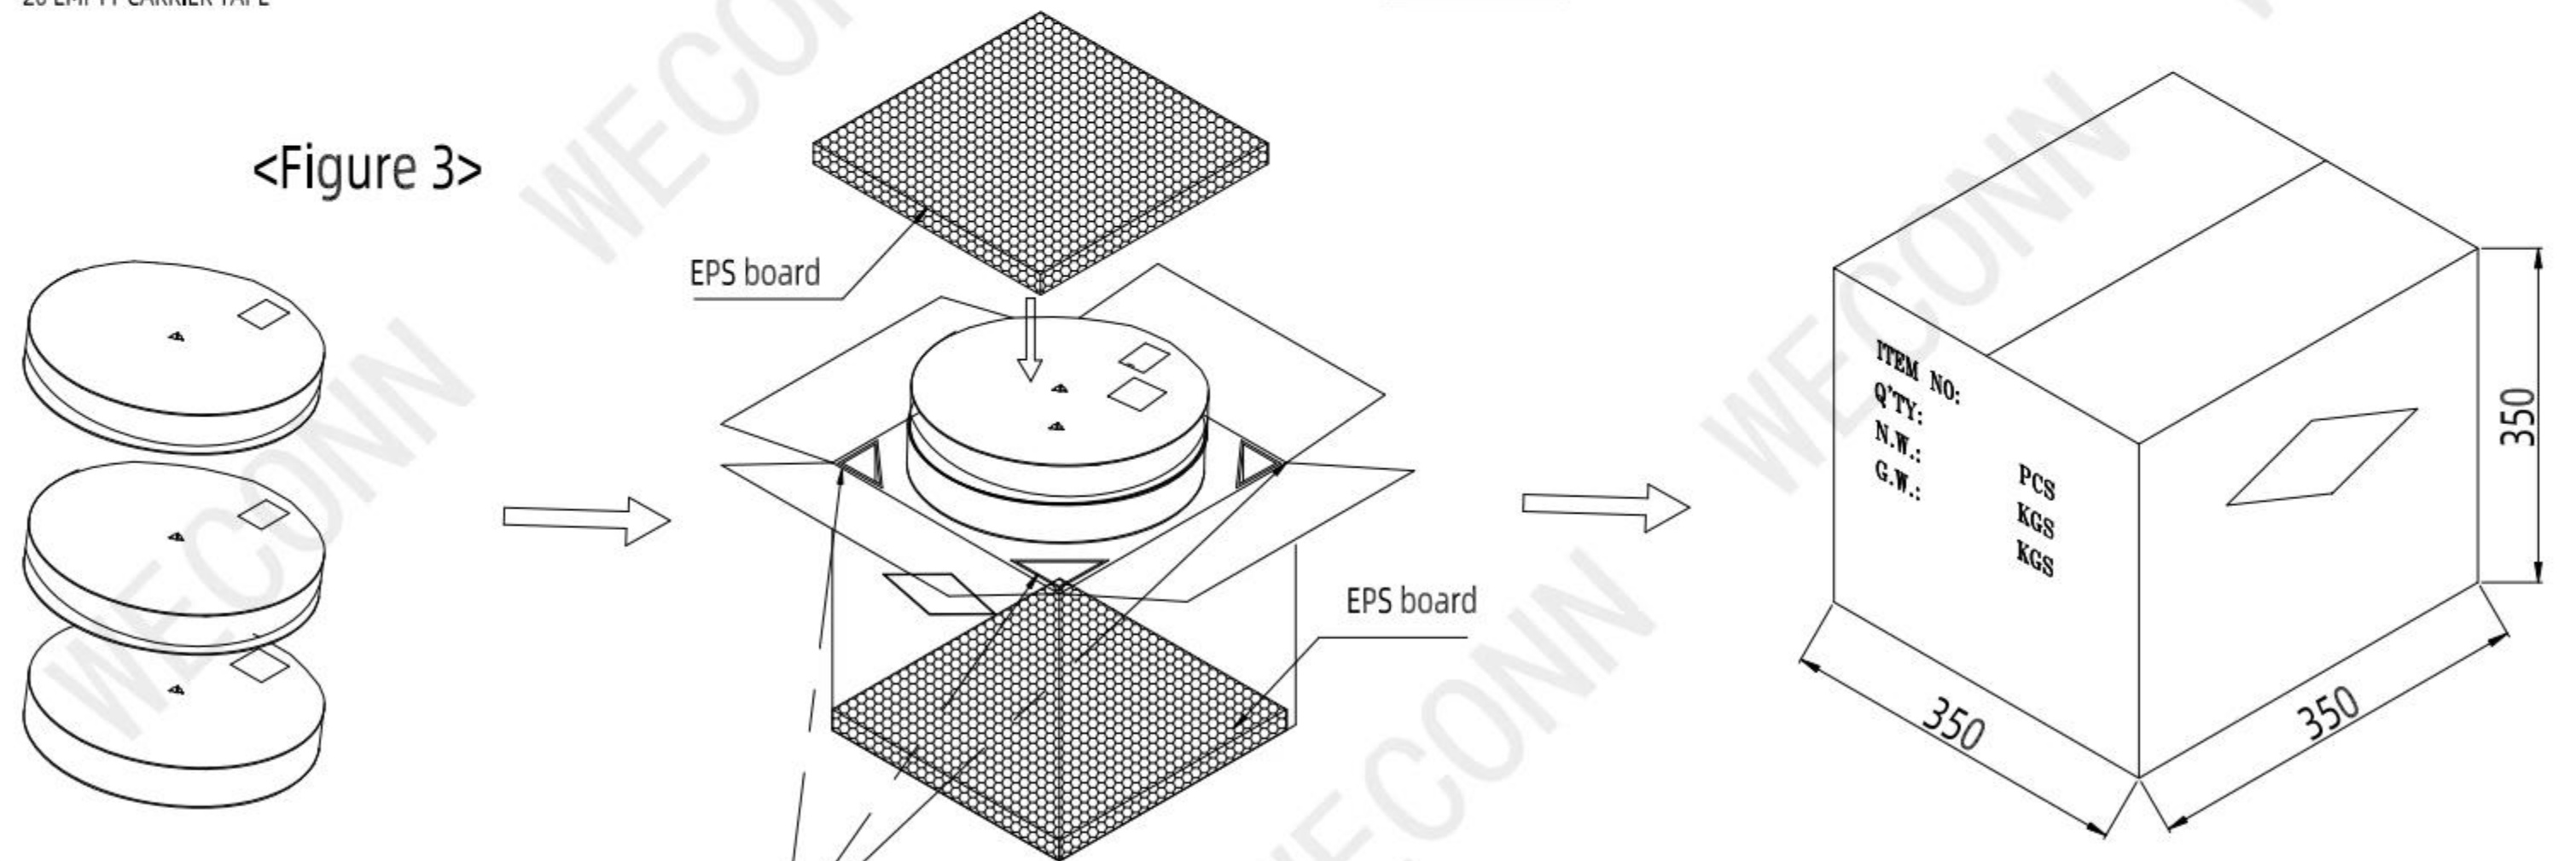

MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd			
X.° ± 2°	X.° ± 2°	MM	PART NUMBER: WL-SIM365-089		TITLE: MICRO SIM卡座 插拔式 8P 防溃P	
.X ± 0.30	.XX ± 0.012	MAT'L	DWG NO.: WL-SIM365-089		APPD:	Cornelia
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	SCALE	SHEET	CHKD:	Mark
.XXX ± 0.10	.XXXX ± 0.004	FINISH	1:1	2/2	DR:	Michael
		SEE NOTES				
THESE DRAWINGS AND PECIFICATION ARE Welink ShenZhen Welink Electronics Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT Welink ShenZhen Welink Electronics Co.,Ltd			QTY	REV.		
			SEE NOTES	A1		