


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2020.12.20	Michael	Mark	Cornelia

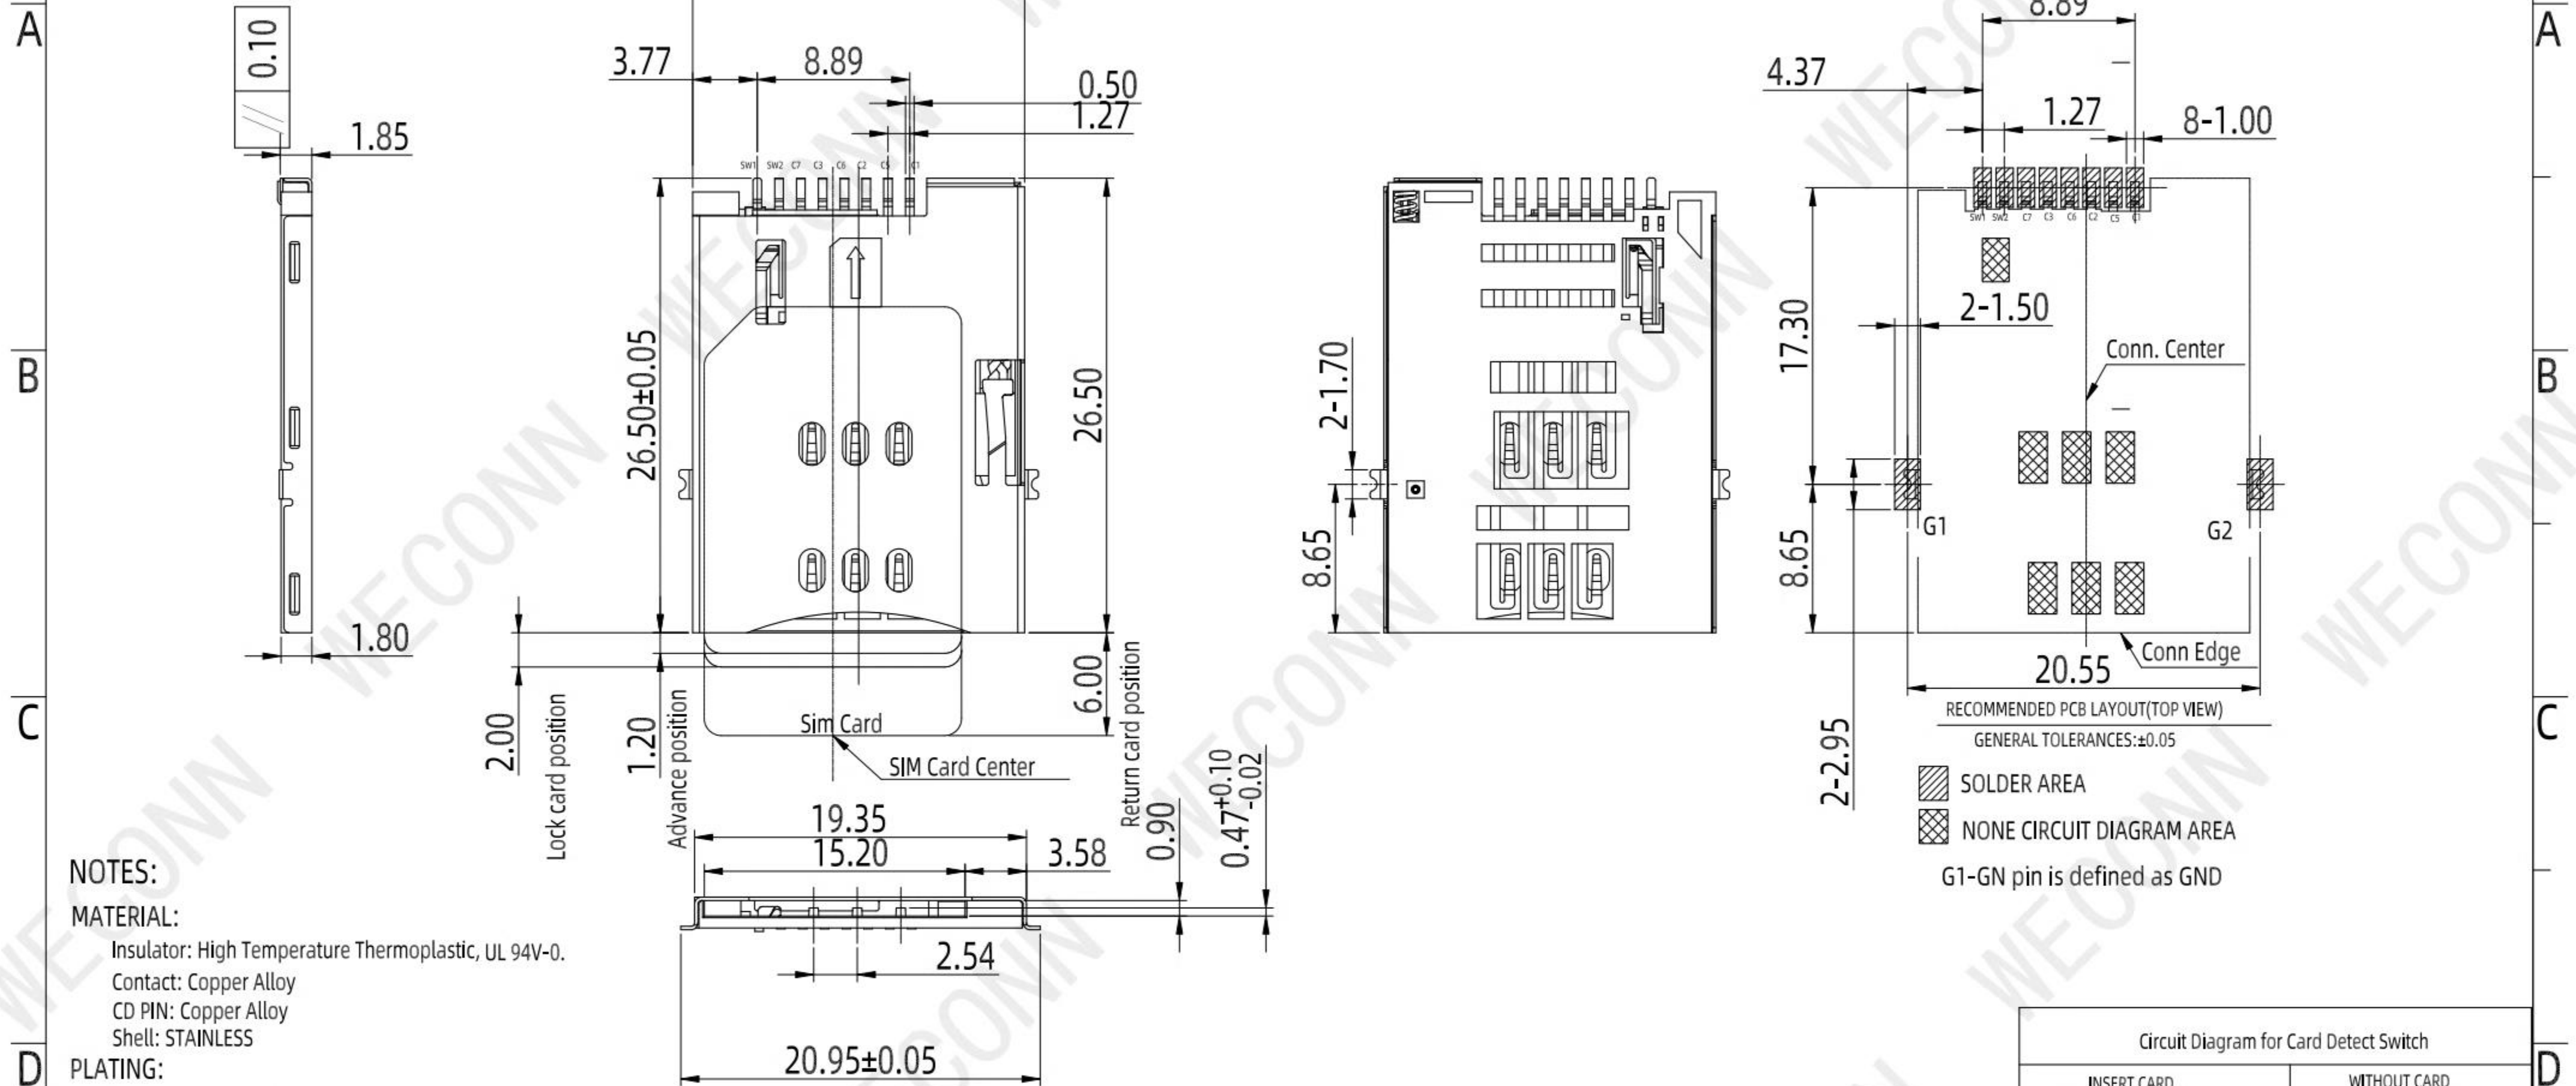

**NOTES:**

**MATERIAL:**

Insulator: High Temperature Thermoplastic, UL 94V-0.  
 Contact: Copper Alloy  
 CD PIN: Copper Alloy  
 Shell: STAINLESS

**PLATING:**

Contact: Plated Ni, contact point gold plated G/F, welding feet Matte tin  
 Shell: Plated Ni Overall Plated G/F Selective Contact Area  
 CD PIN: Plated Ni, tin feet, contact point brush gold

**Electrical:**

Current Rating :0.5A AC/DC max.  
 Voltage Rating :50V AC/DC  
 Ambient Temperature Range :-20°C~+60°C  
 Storage Temperature Range :-40°C~+70°C  
 Ambient Humidity Range :95% R.H. Max.  
 Contact Resistance:100mΩ max.  
 Insulation Resistance:1000MΩ min./500VDC  
 Mating Cycles:5,000 Insertions  
 Temperature: 260°C ±5°

PLEASE CONTACT WELINK SALES REPRESENTATIVE  
 TO VERIFY PRODUCT DETAILS & AVAILABILITY


PIN NO.	DESCRIPTION
C1	VCC
C5	GND
C2	RST
C6	VPP
C3	CLK
C7	I/O
SW1	C/D
SW2	GND

MILLIMETERS	INCH	UNITS
		MM
X° ± 2°	X° ± 2°	
.X ± 0.30	.XX ± 0.012	MAT'L SEE NOTES
.XX ± 0.20	.XXX ± 0.008	FINISH SEE NOTES
.XXX ± 0.10	.XXXX ± 0.004	QTY SEE NOTES

THESE DRAWINGS AND SPECIFICATION ARE WELINK  
 SHENZHEN WELINK ELECTRONICS CO.,LTD  
 COPIED OR USED IN ANY MANNER WITHOUT WELINK  
 SHENZHEN WELINK ELECTRONICS CO.,LTD




**WECONN** 深圳市微连电子有限公司  
**ShenZhen Welink Electronics Co.,Ltd**

PART NUMBER: WL-SIM750-003	TITLE: SIM卡座 自弹式 8P 带侦测 8.65间距 无柱
DWG NO.: WL-SIM750-003	APPD: Cornelia
SCALE 1:1	CHKD: Mark
SHEET 1/2	DR: Michael
REV. A1	

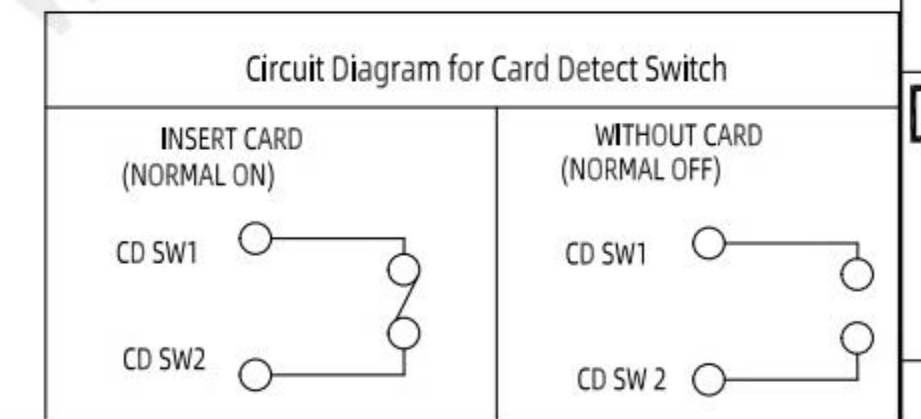

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2020.12.20	Michael	Mark	Cornelia

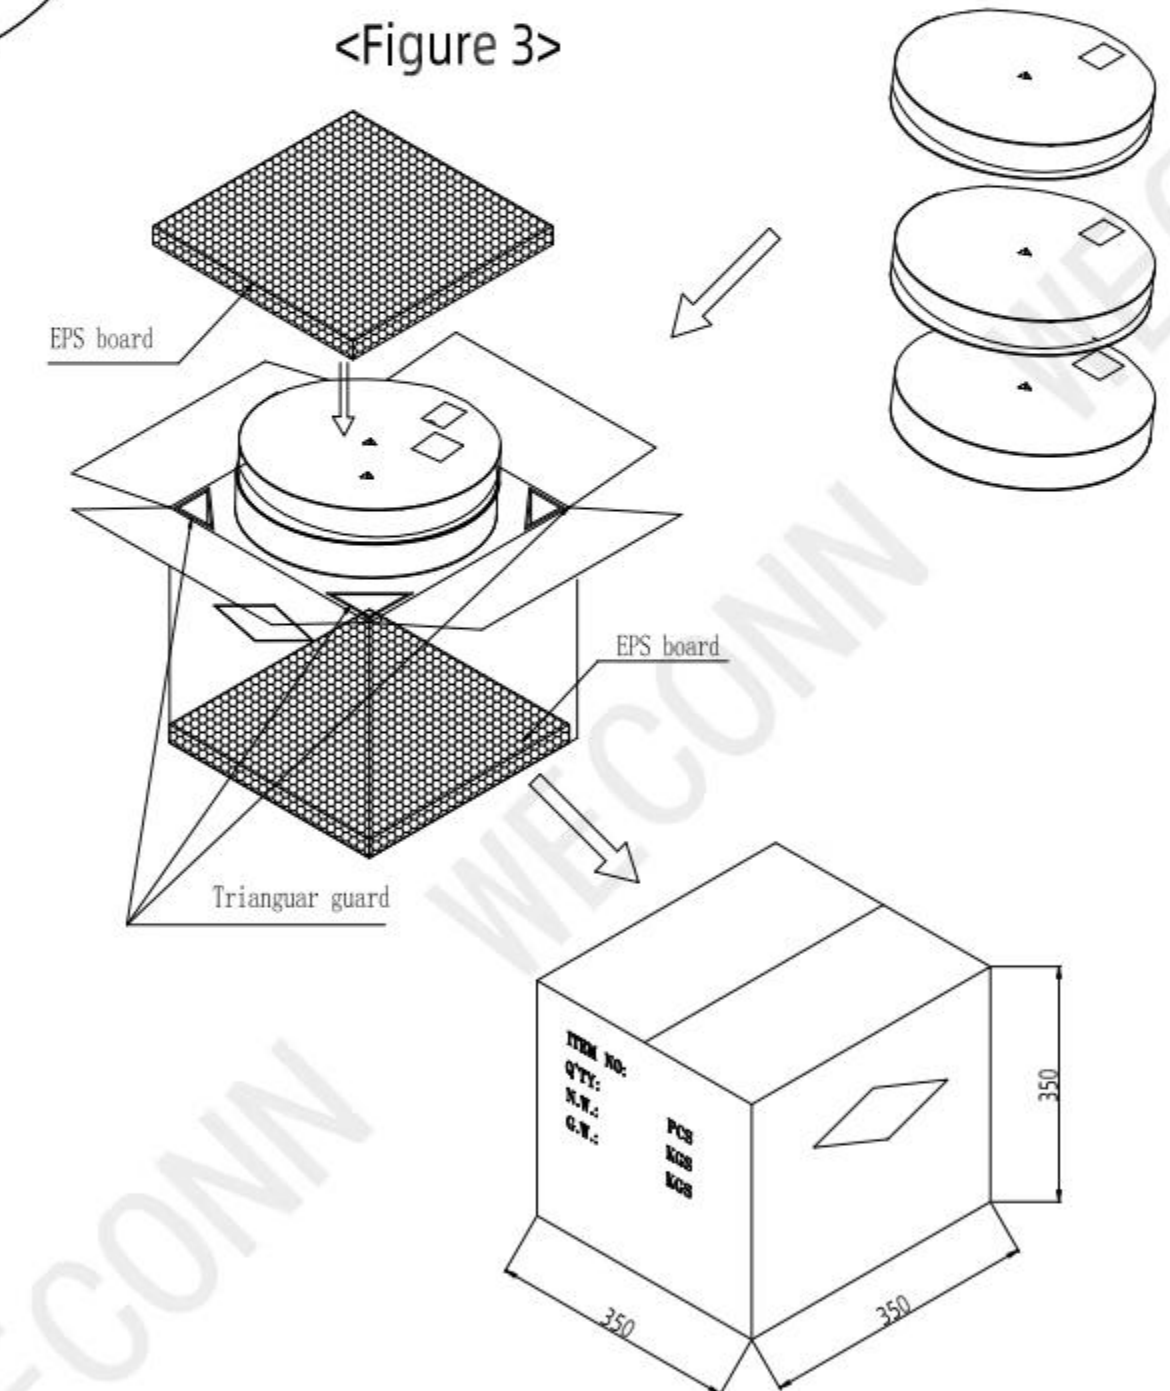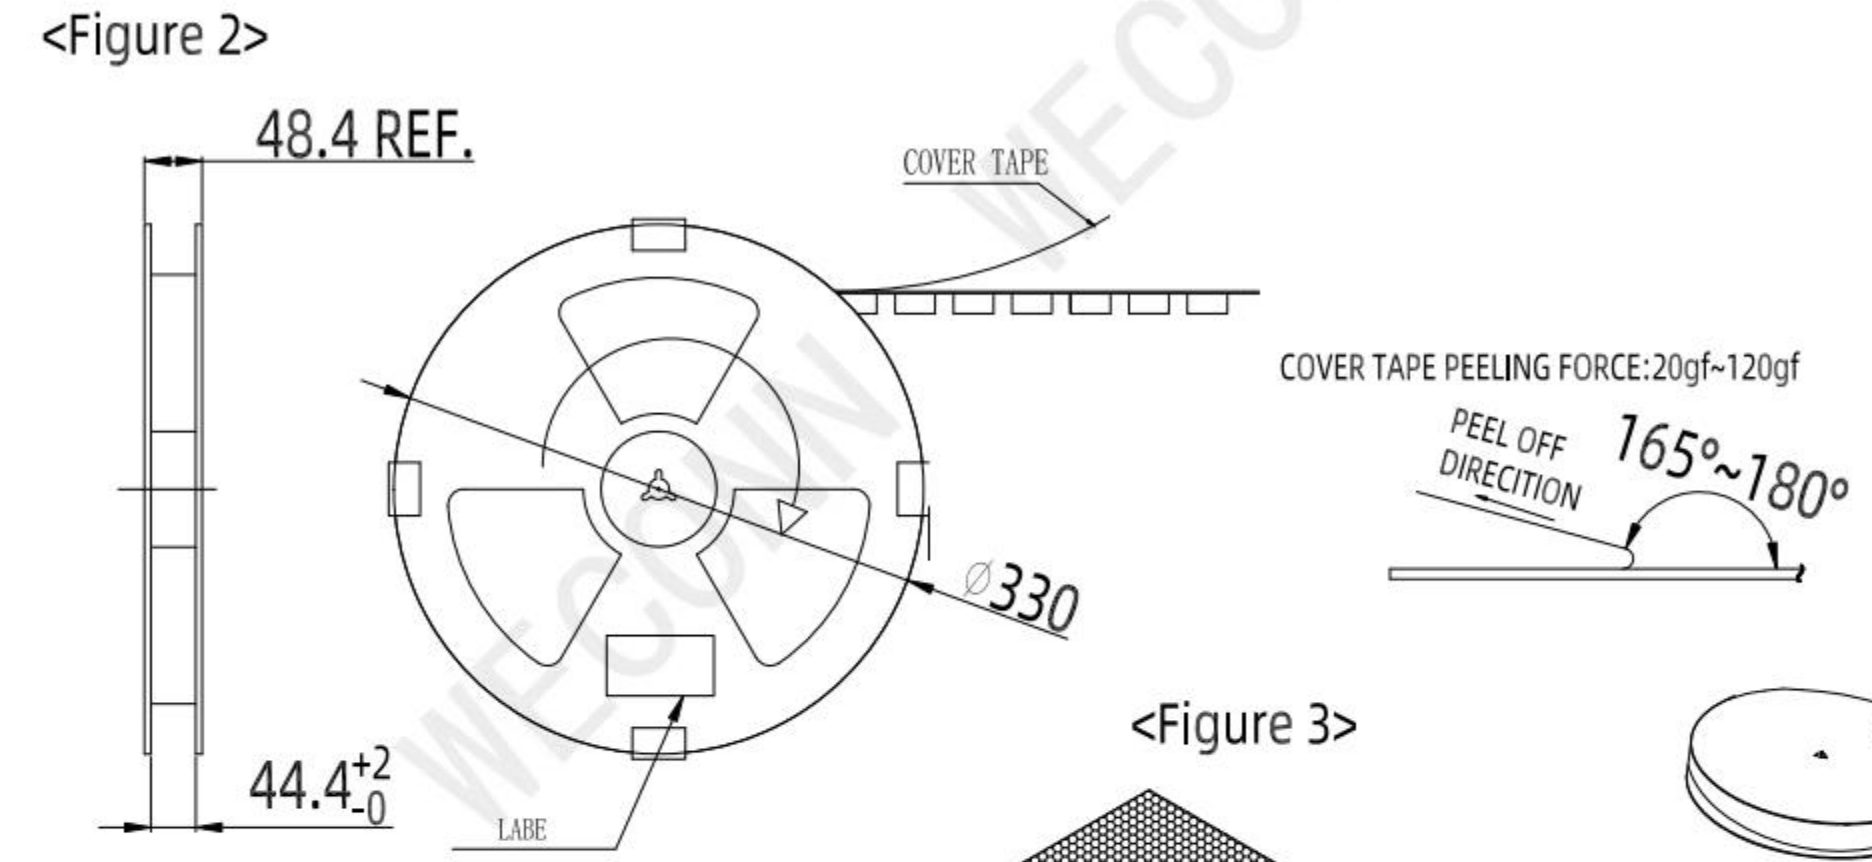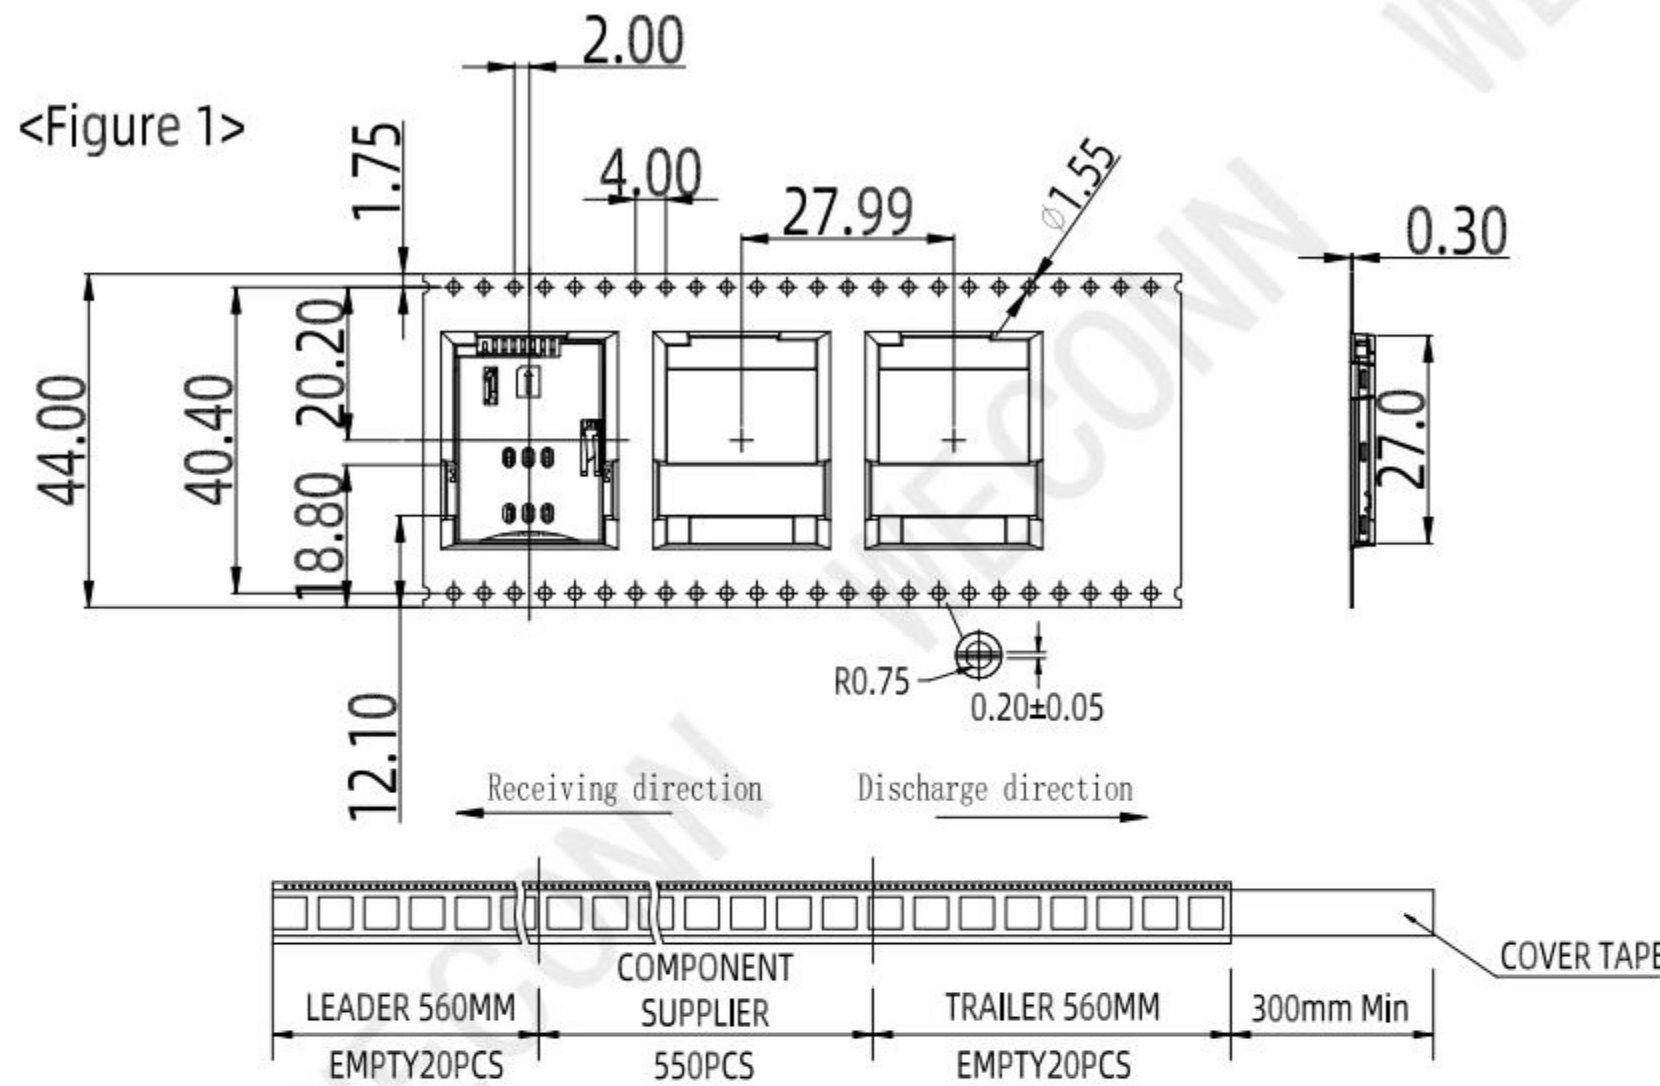

<TABLE 1> PACKAGING QUANTITY

QTY/REEL	REEL/CARTON	QTY/CARTON
550	6	3300

NOTE:

1. Place the product in the download as shown in <Figure 1>, and place 1 PCS product per hole. 2. After the packaging machine is wrapped, stick tape on each equal point of the REEL to prevent the REEL from opening. Each REEL affixed 1PCS label, as shown in <Figure 2>. 3. The packaging quantity is shown as <TABLE 1>. 4. Packed into a box, as shown in <Figure 3>. Put the styrofoam board at the bottom of the box, and then put the specified number of rolled products in waterproof bags and put them in the box. Put our triangular guards into the four corners, and put the styrofoam board on the top layer. 5. Seal the box, write the material number, quantity, etc. on the sealed carton according to customer requirements.

MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd			
X.° ± 2°	X.° ± 2°	MM	PART NUMBER: WL-SIM750-003		TITLE: SIM卡座 自弹式 8P 带侦测 8.65间距 无柱	
.X ± 0.30	.XX ± 0.012	MAT'L	DWG NO.: WL-SIM750-003		APPD:	Cornelia
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	SCALE		CHKD:	Mark
.XXX ± 0.10	.XXXX ± 0.004	FINISH	1:1	SHEET	DR:	Michael
		SEE NOTES		2/2		
THESE DRAWINGS AND SPECIFICATION ARE WECONN'S PROPERTY. COPIED OR USED IN ANY MANNER WITHOUT WECONN'S PERMISSION IS STRICTLY PROHIBITED.				REV.		
				A1		