

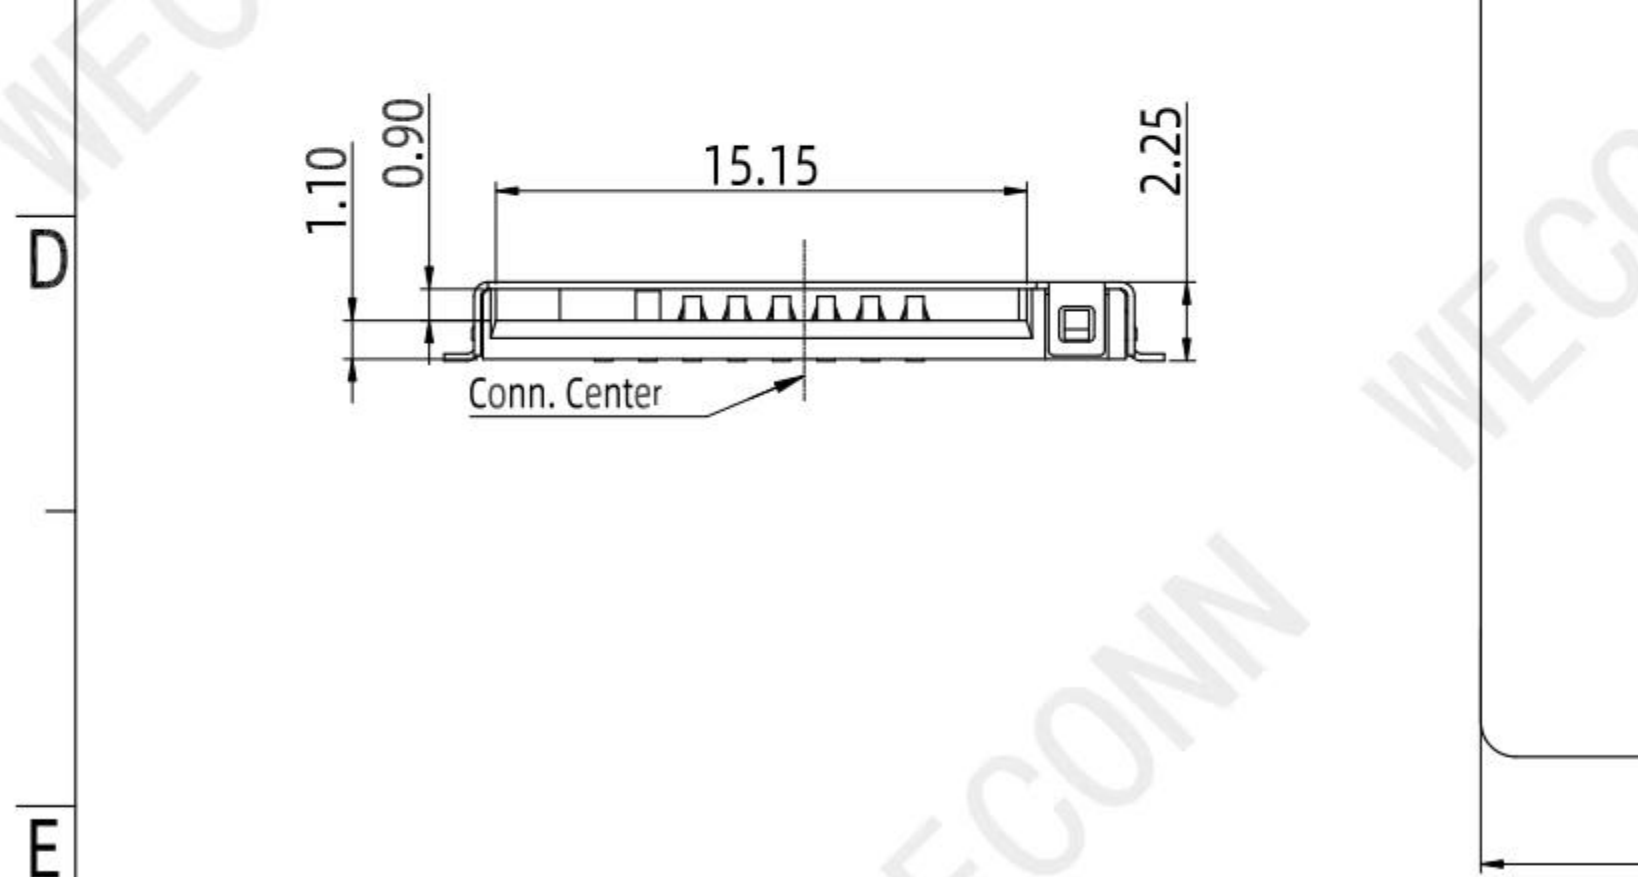


RoHS


REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.11.26	Michael	Mark	Cornelia

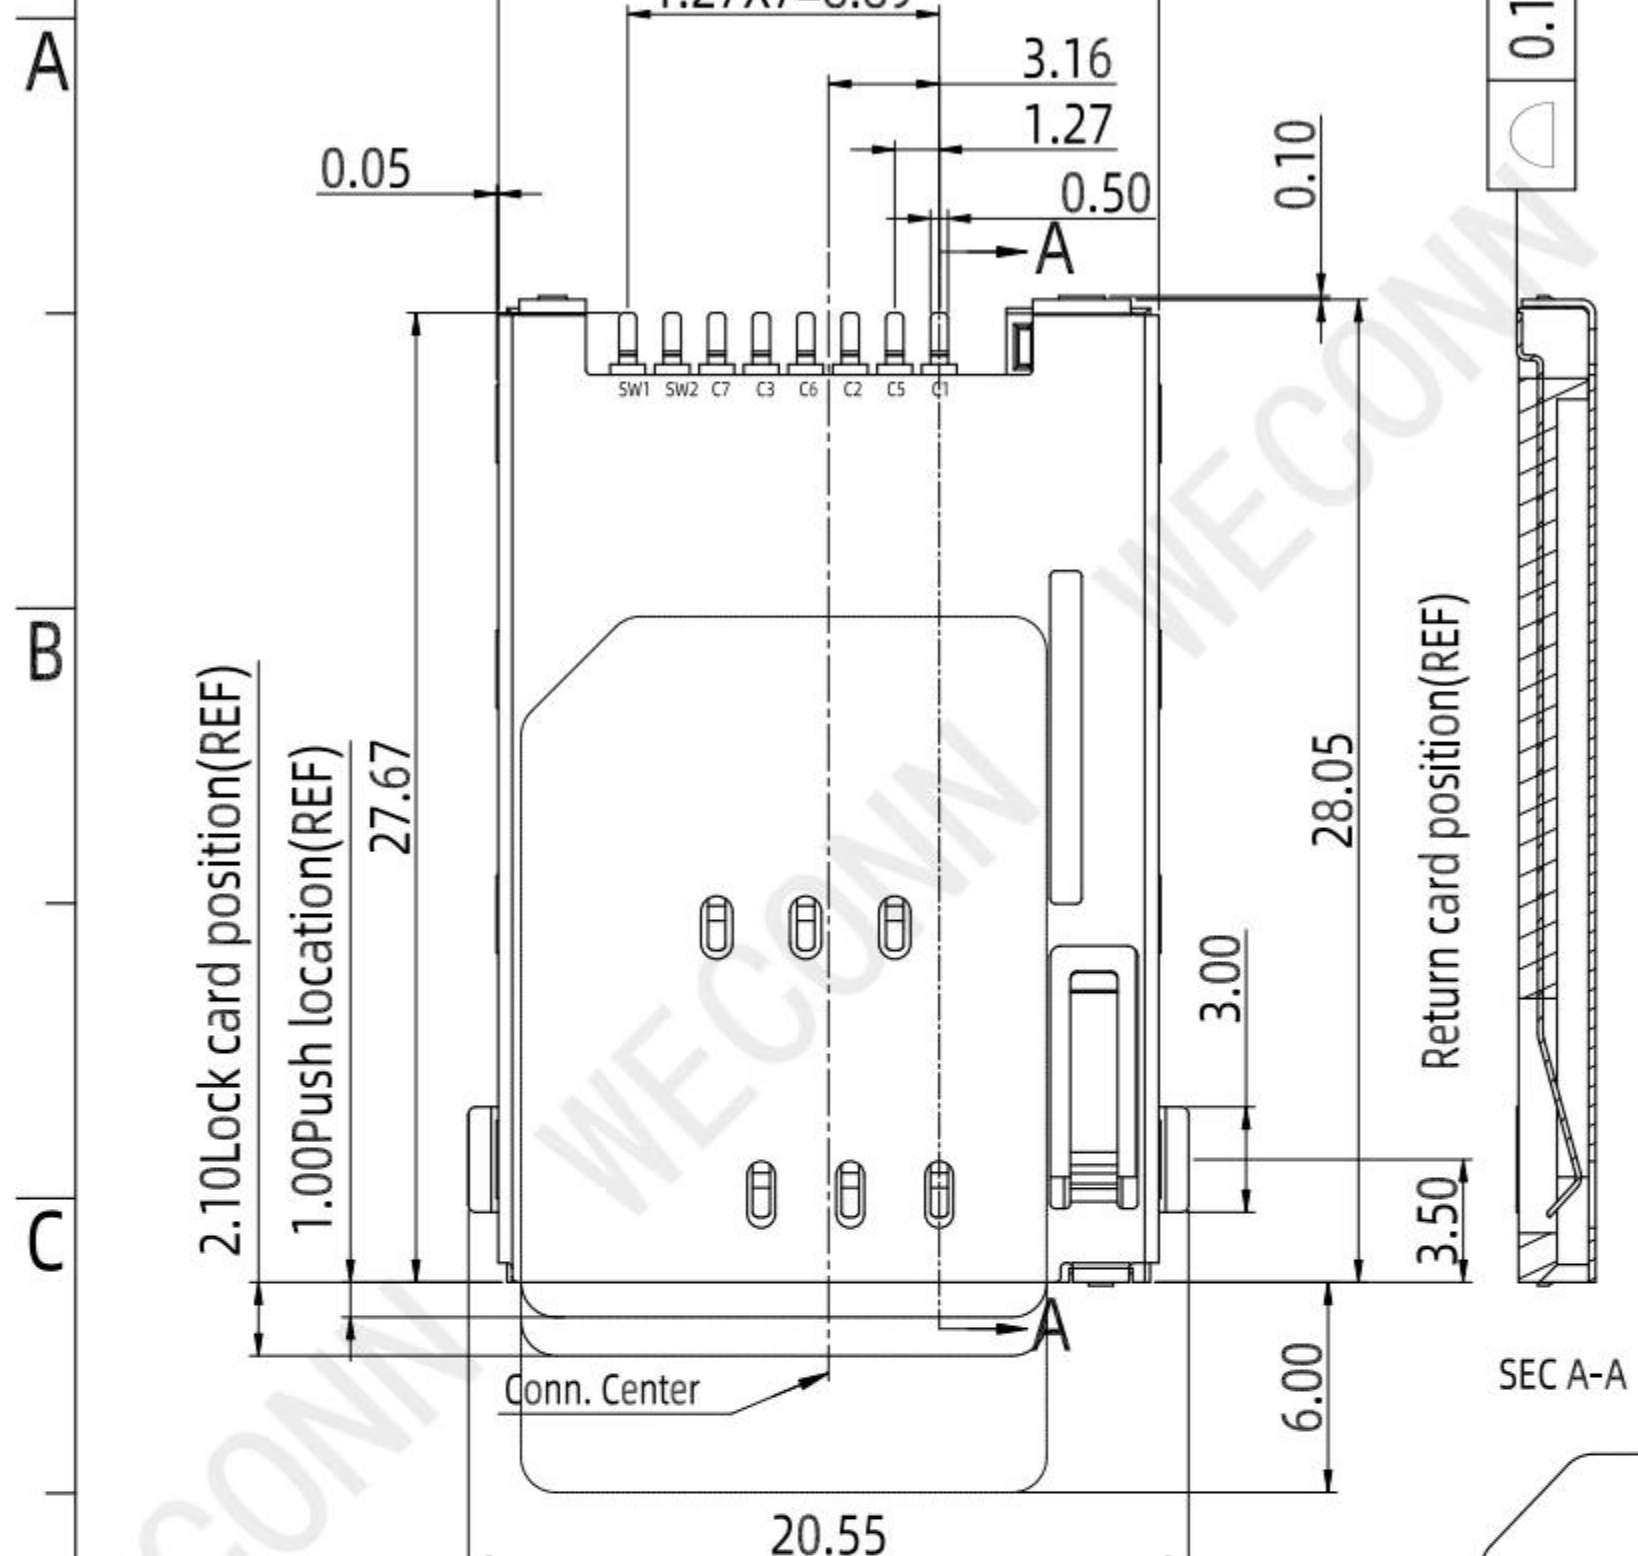

PLEASE CONTACT WELINK SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

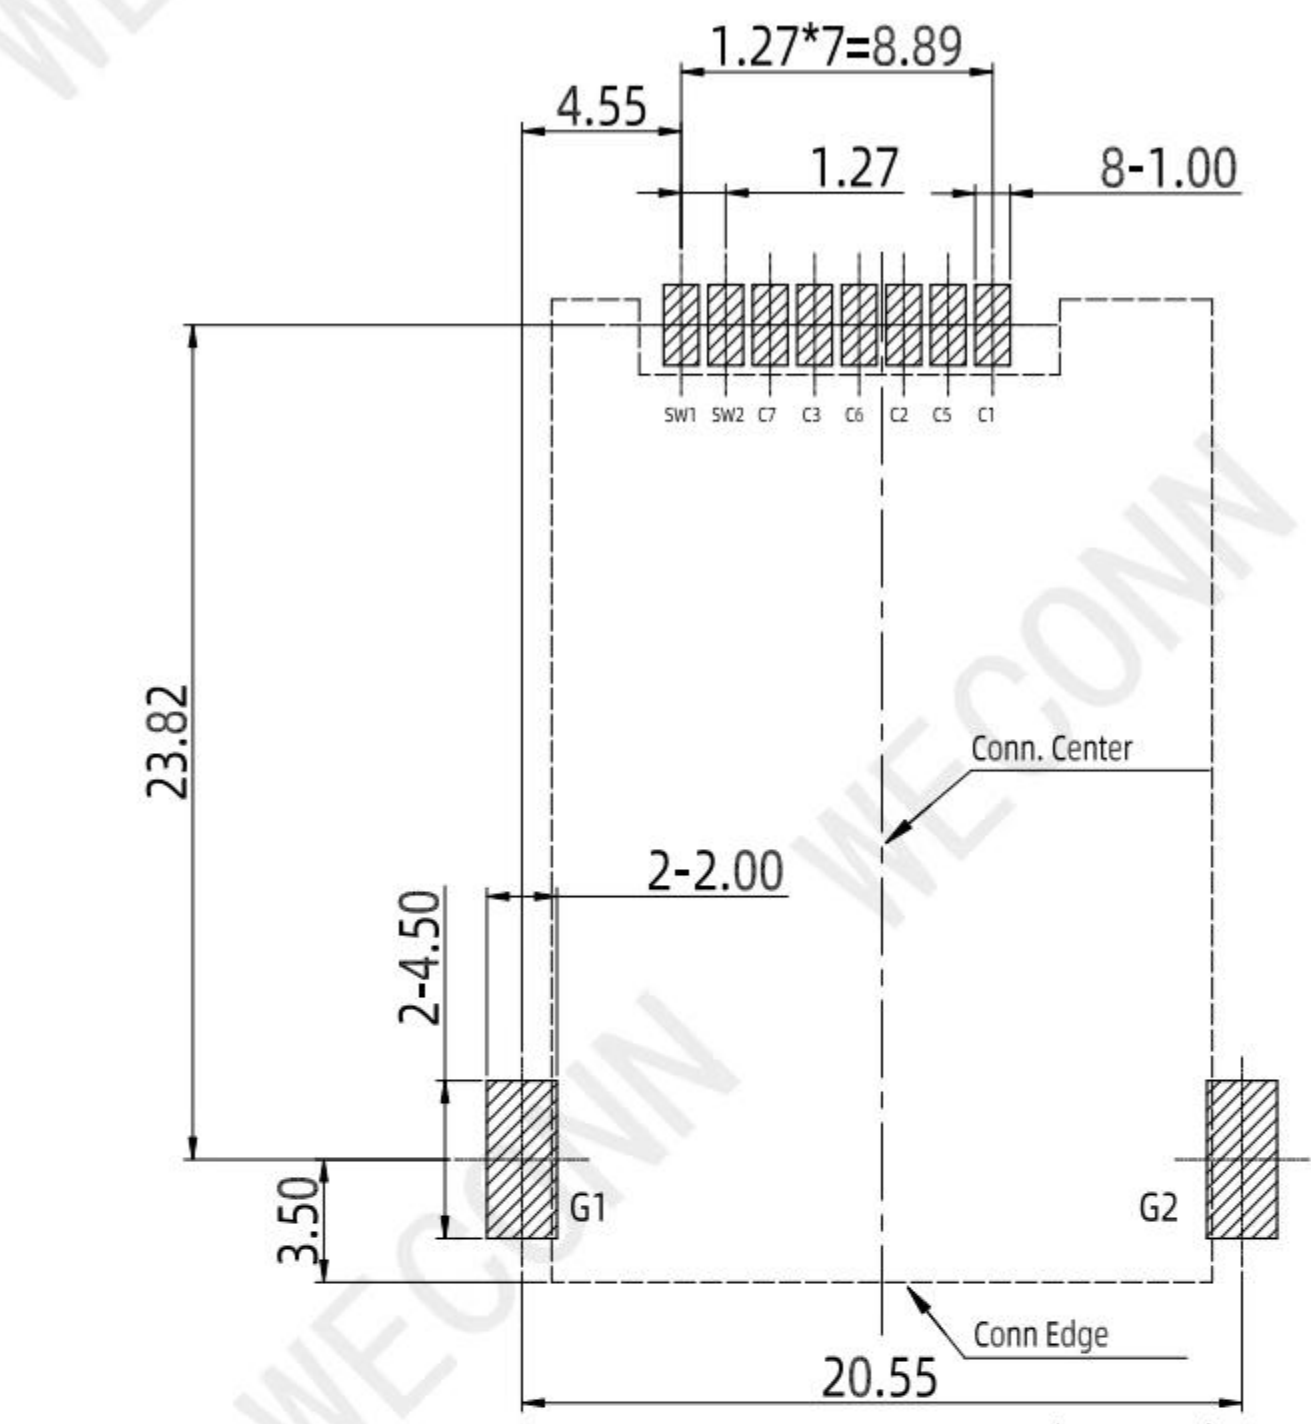


RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05
SOLDER AREA
G1-GN pin is defined as GND

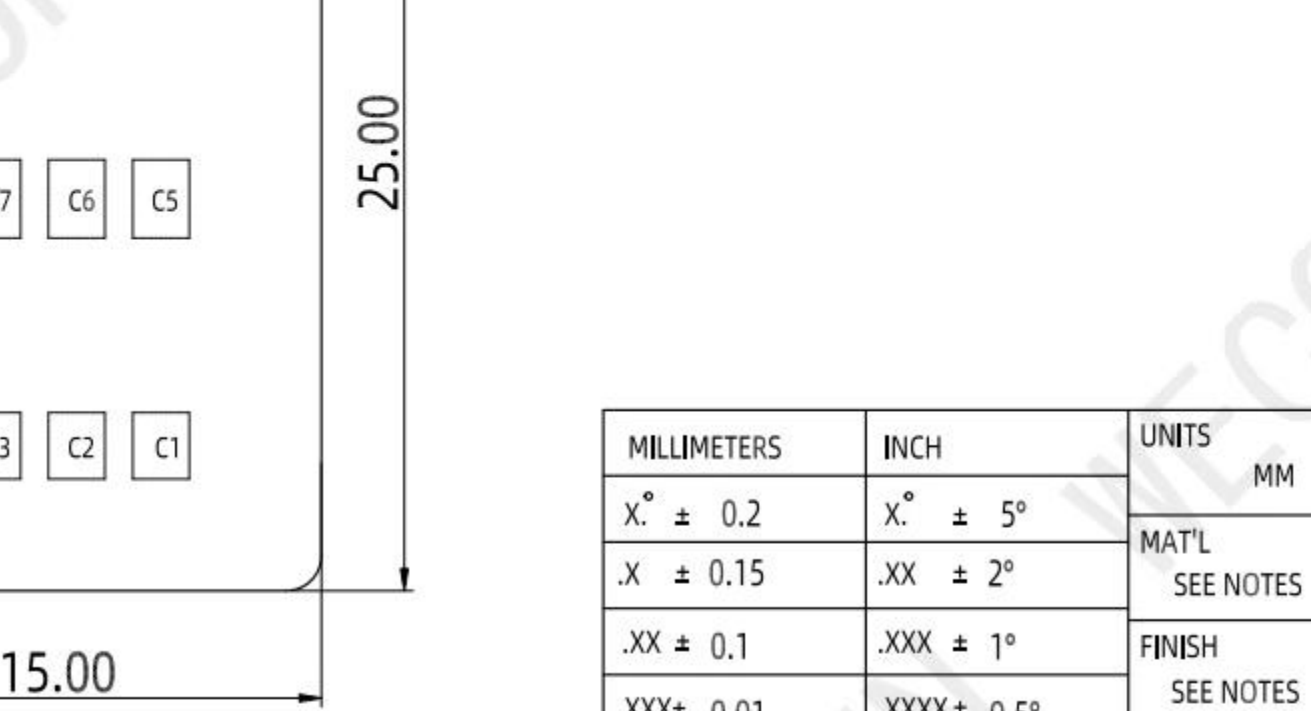

- Specification
- * Electrical Characteristics :
Current Rating: 0.5A AC/DC Max.
Dielectric Withstanding Voltage: 250V AC/DC
Insulation Resistance: 500M ohms Min.
Contact Resistance: 100m ohms Max.
 - * Mechanical Characteristics:
Mating Cycles: 5000 Insertions.
 - * Environmental :
Operating Temperature:-40°C to +85°C.
 - * Material:
1.Housing:HI-Temp plastic UL 94V-0 Rated.
2.Contact:Copper Alloy.
3.Shell:Stainless Steel SUS 304,t=0.20mm.
 - * Plating :
Terminal:
Contact area: Gold Flash Plated Over 40u" Nickel.
Solder area: 80u" Tin Plated Over 40u" Nickel.
Under plate: 40u"Min. Nickel.
Shell:
30u"Min. Nickel Plated Over All,
Solder Area: Gold Flash.



PIN NO.	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
SW1	C/D
C5	GND
C6	VPP
C7	I/O
SW2	GND

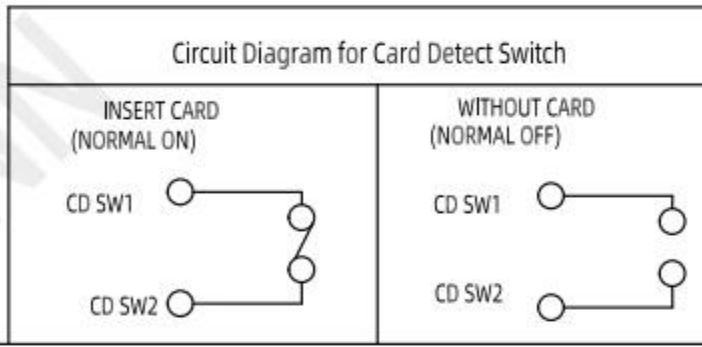

MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd			
X° ± 0.2	X° ± 5°	MM	PART NUMBER: WL-SIM225-109		TITLE: SIM卡座 自弹式 6P 带开关 2.2H	
.X ± 0.15	.XX ± 2°	MAT'L SEE NOTES	DWG NO.: WL-SIM225-109		APPD:	Cornelia
.XX ± 0.1	.XXX ± 1°	FINISH SEE NOTES	SCALE	SHEET	REV.	CHKD: Mark
.XXX ± 0.01	.XXXX ± 0.5°	QTY SEE NOTES	1:1	1/2	A1	DR: Michael
THESE DRAWINGS AND PECIFICATION ARE Welink ShenZhen Welink Electronics Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT Welink ShenZhen Welink Electronics Co.,Ltd						

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	2019.11.26	Michael	Mark	Cornelia

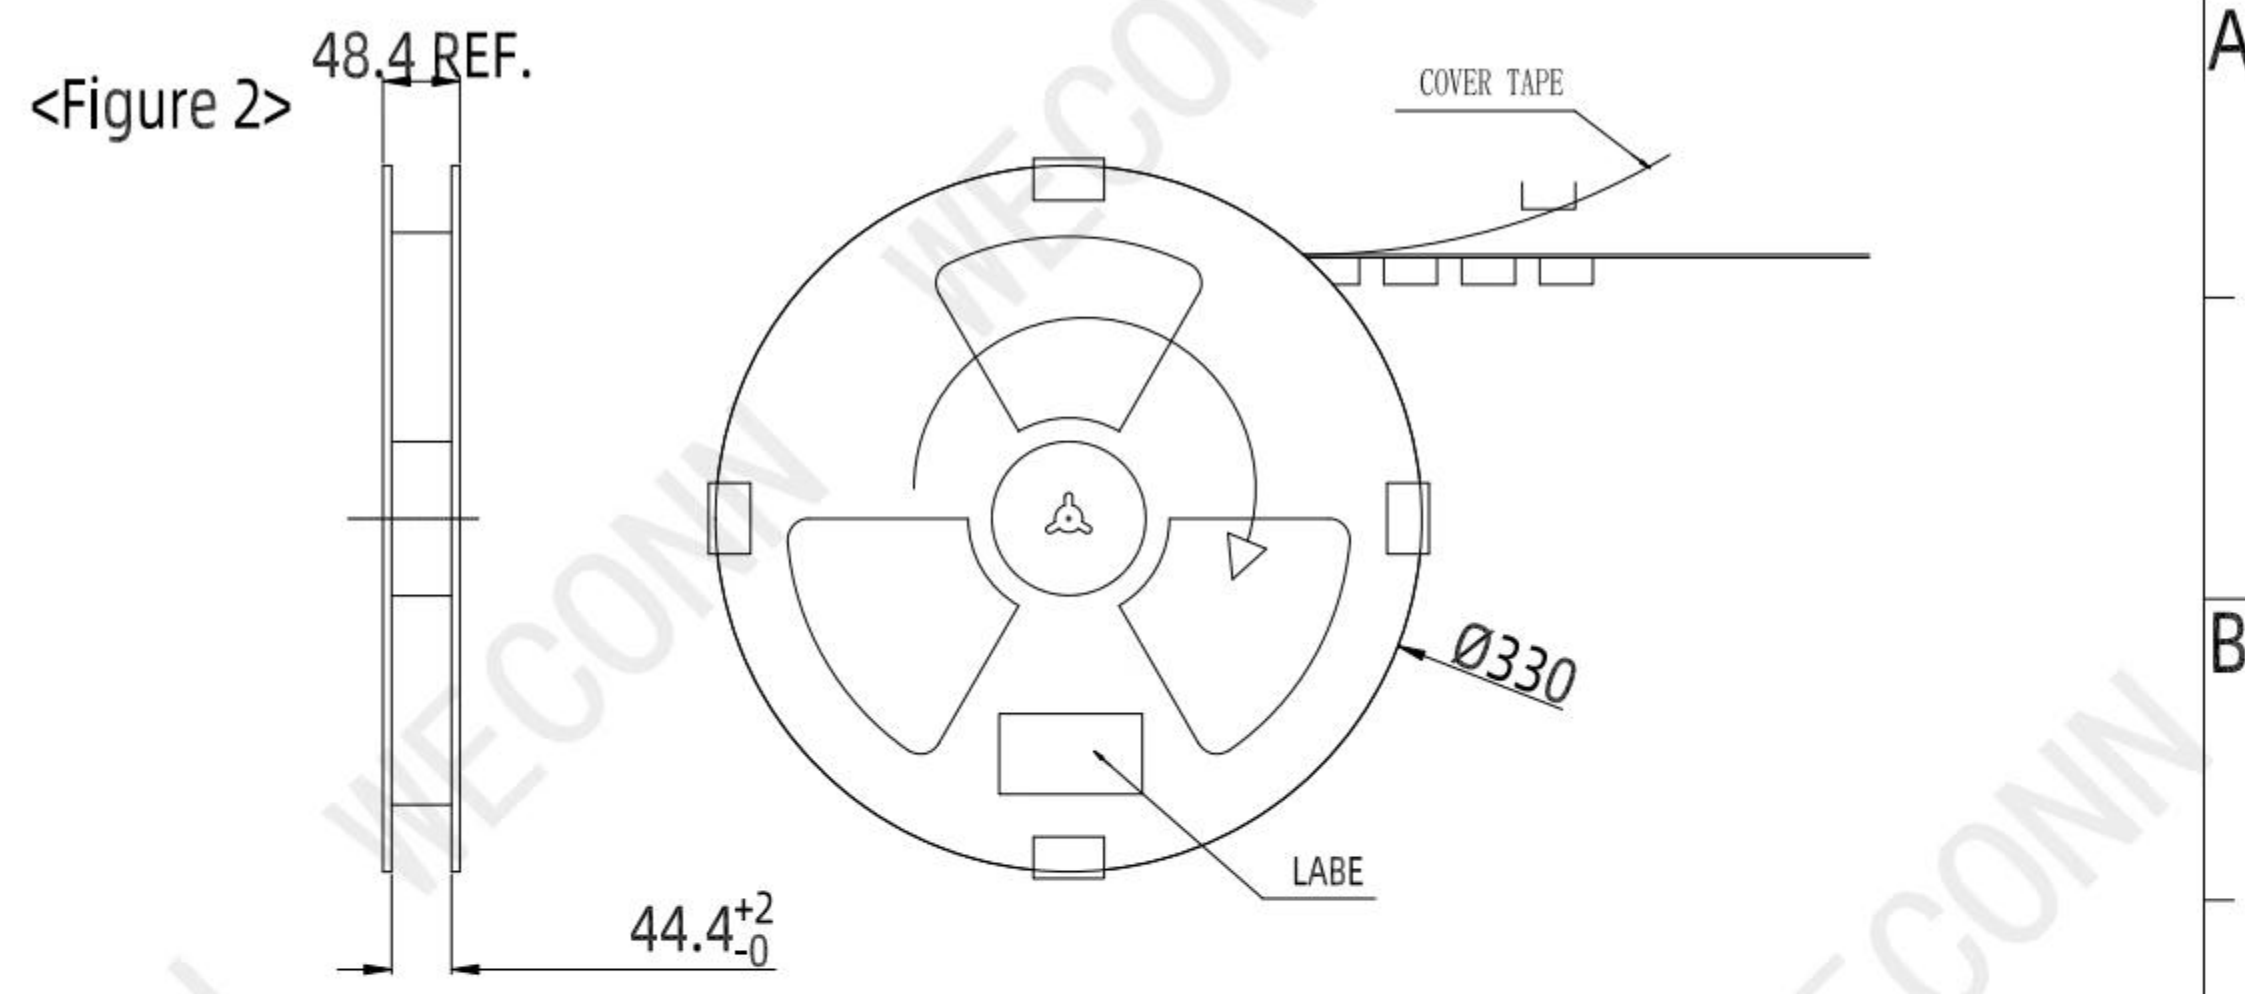
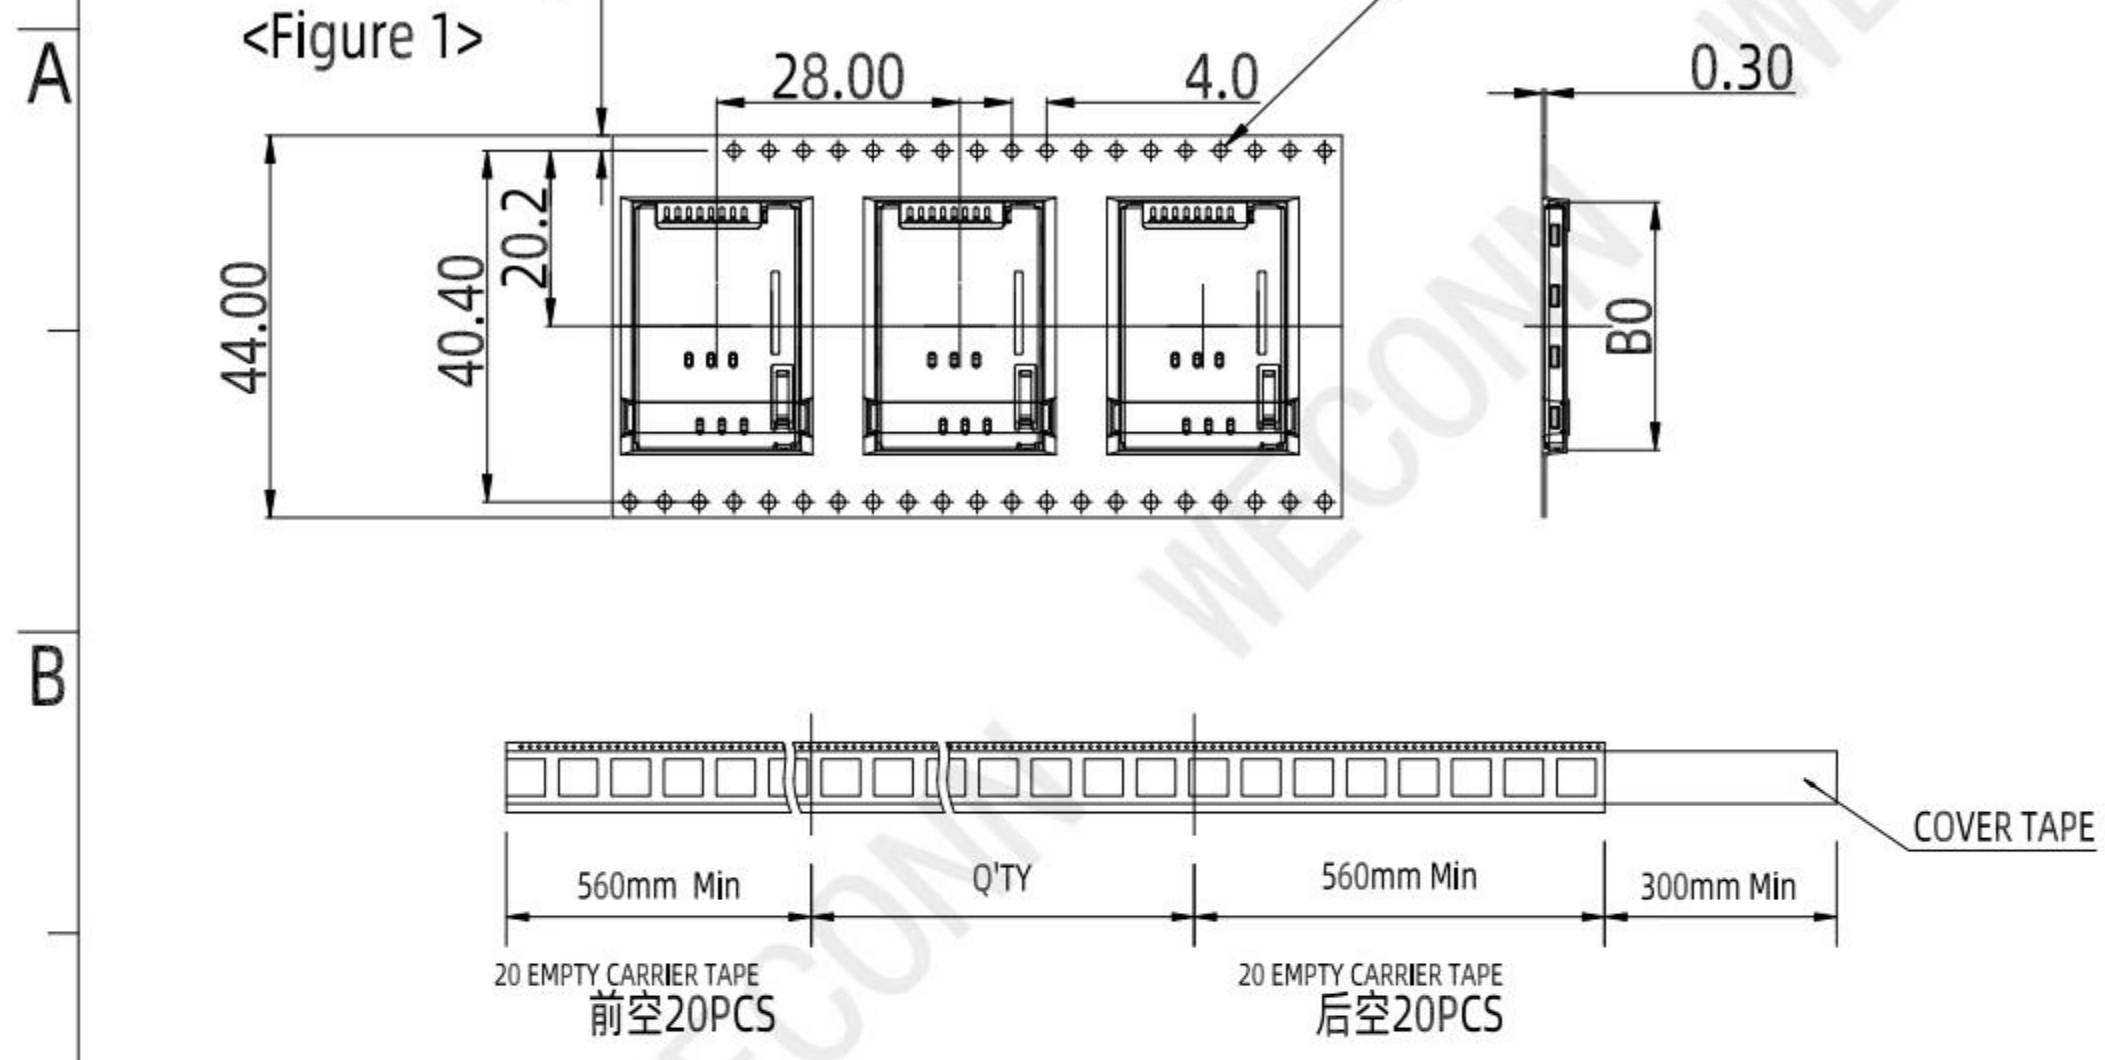


<TABLE 1> PACKAGING QUANTITY

QTY/REEL	REEL/CARTON	QTY/CARTON
700	6	4200

COVER TAPE PEELING FORCE: 20gf~120gf

<Figure 3>

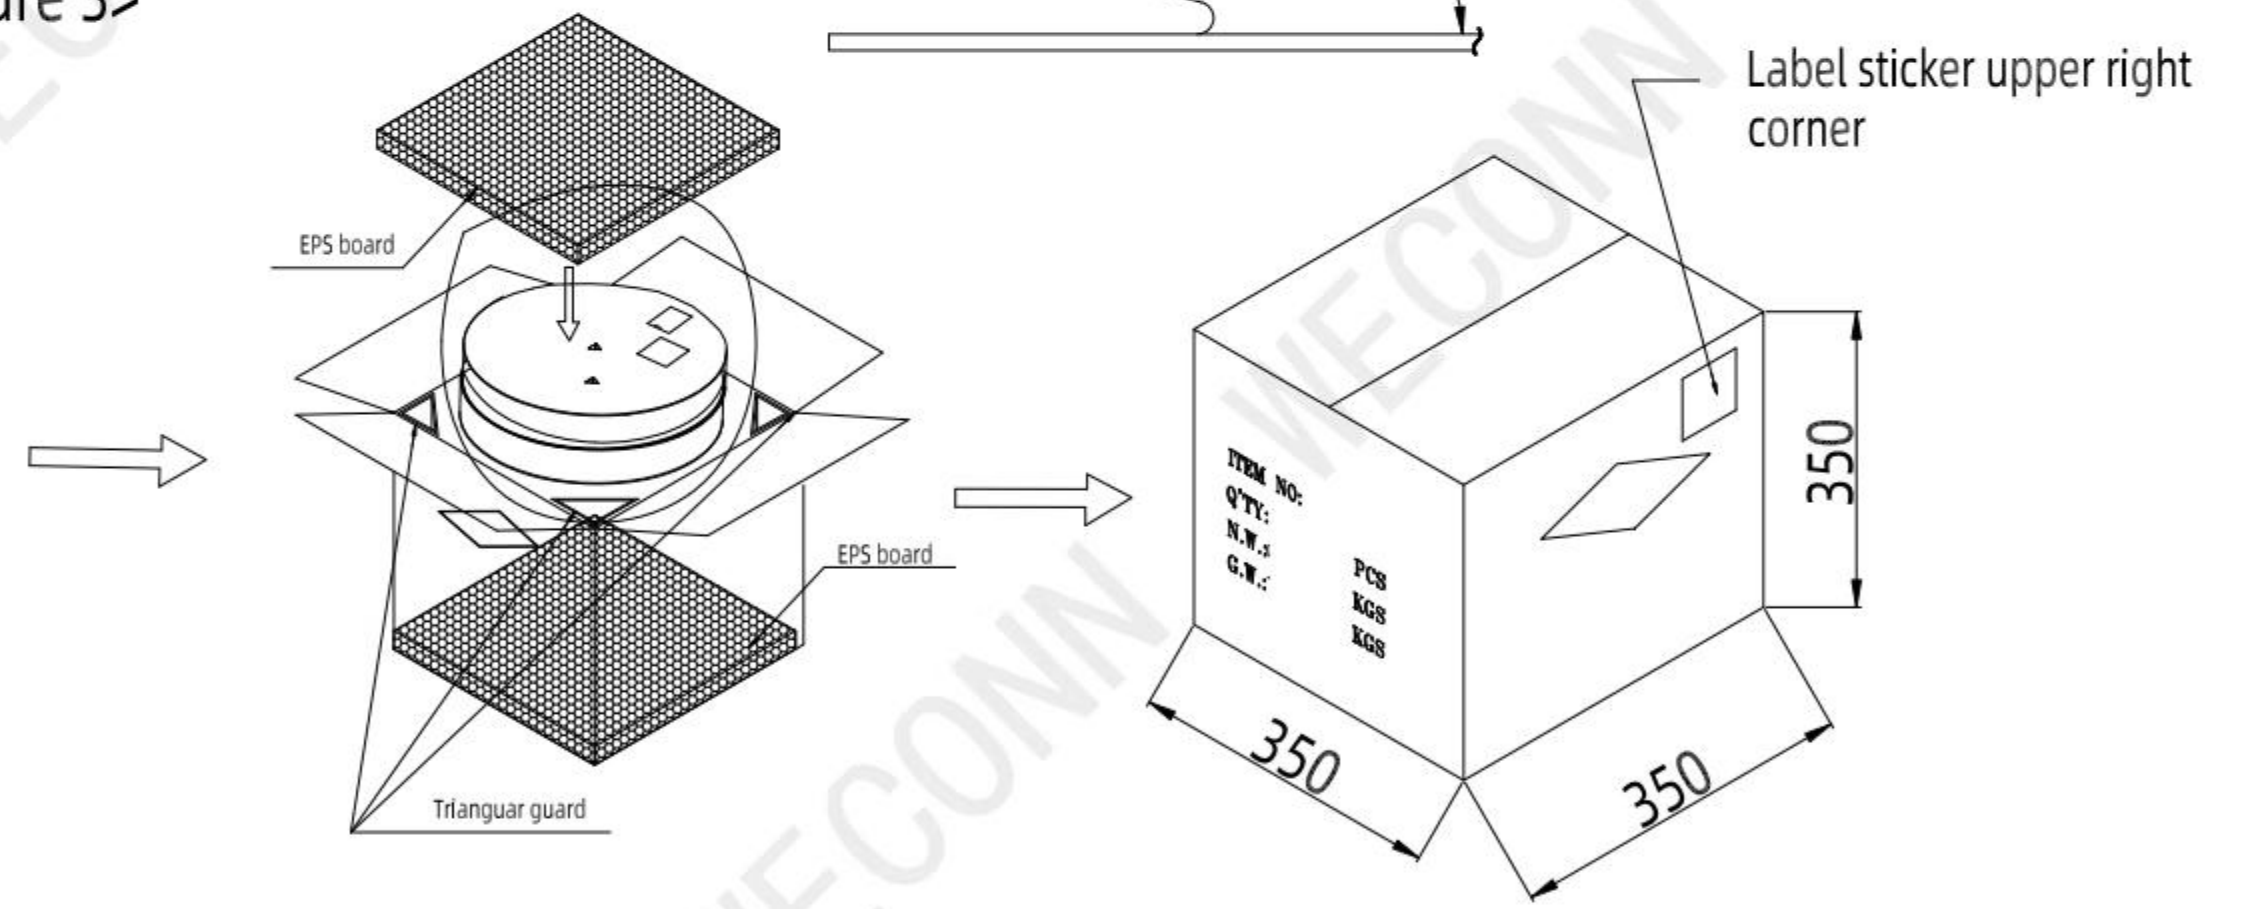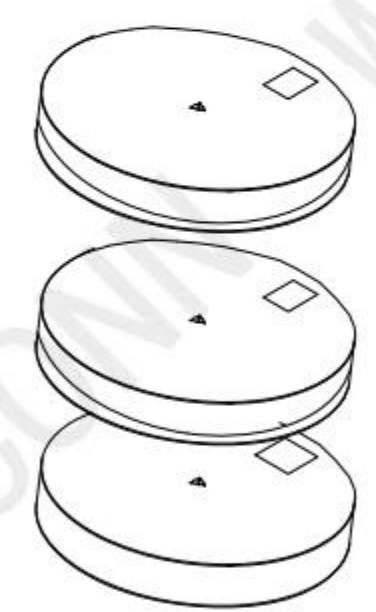

- NOTE:
1. Place 1 PCS product per hole according to <Figure 1>.
 2. After the packaging machine is wrapped, stick tape on each equal point of the REEL to prevent the REEL from scattered. label each REEL, as shown in <Figure 2>
 3. The packaging quantity is shown as <TABLE 1>
 4. Package, as shown in <Figure 3>
- Put the EPS board at the bottom of the box, and then put the REEL into the box. Put four triangular guards into the four corners, and put the EPS board on the top.
5. Seal the box, write the material number, quantity, etc. on the sealed carton according to customer requirements

MILLIMETERS	INCH	UNITS	WECONN® 深圳市微连电子有限公司 ShenZhen Welink Electronics Co.,Ltd			
X. ^o ± 0.2	X. ^o ± 5°	MM	PART NUMBER: WL-SIM225-109		TITLE: SIM卡座 自弹式 6P 带开关 2.2H	
.X ± 0.15	.XX ± 2°	MAT'L SEE NOTES	DWG NO.: WL-SIM225-109		APPD: Cornelia	
.XX ± 0.1	.XXX ± 1°	FINISH SEE NOTES	SCALE: 1:1	SHEET: 2/2	CHKD: Mark	
.XXX ± 0.01	.XXXX ± 0.5°	QTY SEE NOTES	REV.: A1	DR: Michael		
THESE DRAWINGS AND PECIFICATION ARE Welink ShenZhen Welink Electronics Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT Welink ShenZhen Welink Electronics Co.,Ltd						